

+5,9%
price increase as of
1st January 2019

on therm-x2 Steel Panel
Radiators Price list I/2018
(+4,9% price increase on
accessories)

Price list I / 2018 | Price basis 01.02.2018

therm-x²® steel panel radiators



I like it cosy. Kermi.

I like it cosy. Kermi.

At home within your own four walls. This is precisely where we yearn to be comfortable, in familiar surroundings, feeling safe and secure. The thermal comfort being right makes a significant contribution towards us experiencing our home in this way, allowing us to relax and have a rest.

What makes the right thermal comfort? How do you measure being comfortable? At Kermi, we have been working on this for decades now. It all started with radiators and surface heating. Today, our focus is on creating an optimal temperature in the rooms we work and live in. We provide a feeling of relaxing comfort and security throughout the year with integral solutions for optimal warmth and thermal comfort in both new-builds and also in renovated old buildings.

Healthy thermal comfort affects many aspects of life. Feeling good is what we experience. Future-proof and sustainable products made by Kermi give you the security of knowing that you have made a good decision for the environment as well. The "Kermi system x-optimised" provides optimal energy efficiency thanks to sophisticated interaction between all elements. All the while giving you a

reliable high quality standard of Kermi components and systems. It is seamlessly realised from product development through production to final inspection. On top of that, the working cooperation with our specialist partners, pre-sales and after-sales service, and the large number of additional services we offer give you a good feeling about it all.

With highly innovative solutions, Kermi ensures there is healthy and green feel-good warmth combined with fresh, clean air, making you feel comfortable throughout the house. To ensure you feel good at home!

For nearly six decades now, Kermi has been developing and producing thermal comfort and shower design products at their headquarters in Lower Bavaria. Today, Kermi is among the leading manufacturers in Europe in these areas. As a pioneer when it comes to economy and ecology, Kermi keeps setting standards in technology, design, and efficiency with its around 1300 qualified employees.

You can find out more about Kermi and our locations at www.kermi.com



The ultimate feel-good factor.
With maximum energy efficiency.
How about that?



You can rely on this

MADE IN
GERMANY

The highest quality.
Produced in Germany for
nearly sixty years now



Heat output according
to European standard
DIN EN 442



Certified management
system according to ISO 9001/
140001/50001



RAL quality mark as a guaran-
tee for the highest quality



All products are manufactured
to the highest product quality
standards according to EN 442



Comprehensive product data
for the BIM planning process

Everything for healthy thermal comfort

Sustainably generating heat. Storing heat energy in the long term. Selectively controlling heat. Efficiently transferring heat. And ventilating your living space in a controlled manner. This is the innovative and integral approach of the "Kermi system x-optimised".

A system for the future

Comfortable warmth and controlled ventilation are what affect your well-being in your work and living space. Heating and ventilation are mutually dependent. The trailblazing "Kermi system x-optimised" offers a range of advantages for future-proof heating and ventilation technology.

A systemic approach is paramount, the heart of which is modern management of energy and comfort levels. It optimises the interfaces, minimises energy losses between system components and improves the energy efficiency by miles. The innovative x-buffer layered buffer storage is optimally coordinated with the operating mode and efficiency of the x-change heat pump. Heat transfer has its clearly defined place within the system. The living room ventilation ensures that there is dust and pollen-free fresh air which ensure the best air quality in the room.

And the systemic approach goes even further. Components which fit together and are perfectly tailored to each other mean greater security. Kermi's unique Plug & Heat principle unites the parts of the installation which belong together. The intuitive operation of the system makes it easy to optimally control it in daily use.

Improving energy efficiency

The energy efficiency of the entire system is the result of the x-fold optimised components and their perfect interaction. Each component is designed to be highly efficient in its own right. The x-fold optimisation between individual components considerably increases the efficiency of the whole system even further. Having all system components from a single source means that you get additional quality and planning security.

All parts of the "Kermi system x-optimised" have been developed by Kermi or under Kermi's direction, using state-of-the-art technology, and have been subjected to strenuous testing. This is why "x-optimised" is an x-fold promise for x-fold performance.

The "Kermi system x-optimised" controls the interaction of the areas with attention to detail and demand:



Being comfortable – from a single source

The whole is more than the sum of its individual parts. Particularly if every part is powerful, works reliably, is of high quality and meets modern design requirements. Nothing less will do as far as we at Kermi are concerned.


Integrated solutions from the heating specialist

Every building has different framework conditions and requirements. With Kermi you have a competent partner for optimal heating and thermal comfort by your side in residential construction. With integrated solutions from a single source, not only are efficiency and energy savings guaranteed, but also a feeling of homeliness and comfort. Even with complicated structural conditions in an existing building, heating and thermal comfort systems made by Kermi provide a significant advantage. This is because the components are also highly efficient and innovative during energy-efficient refurbishing of existing buildings.

Functionality combined with attractive design

Functionality and design have always belonged together at Kermi. In every product we develop we work towards combining both aspects at a high level. Prizes and awards for innovative technological solutions and product design are the result. This means you can rely on the quality, functionality and design of Kermi's brand products and systems.



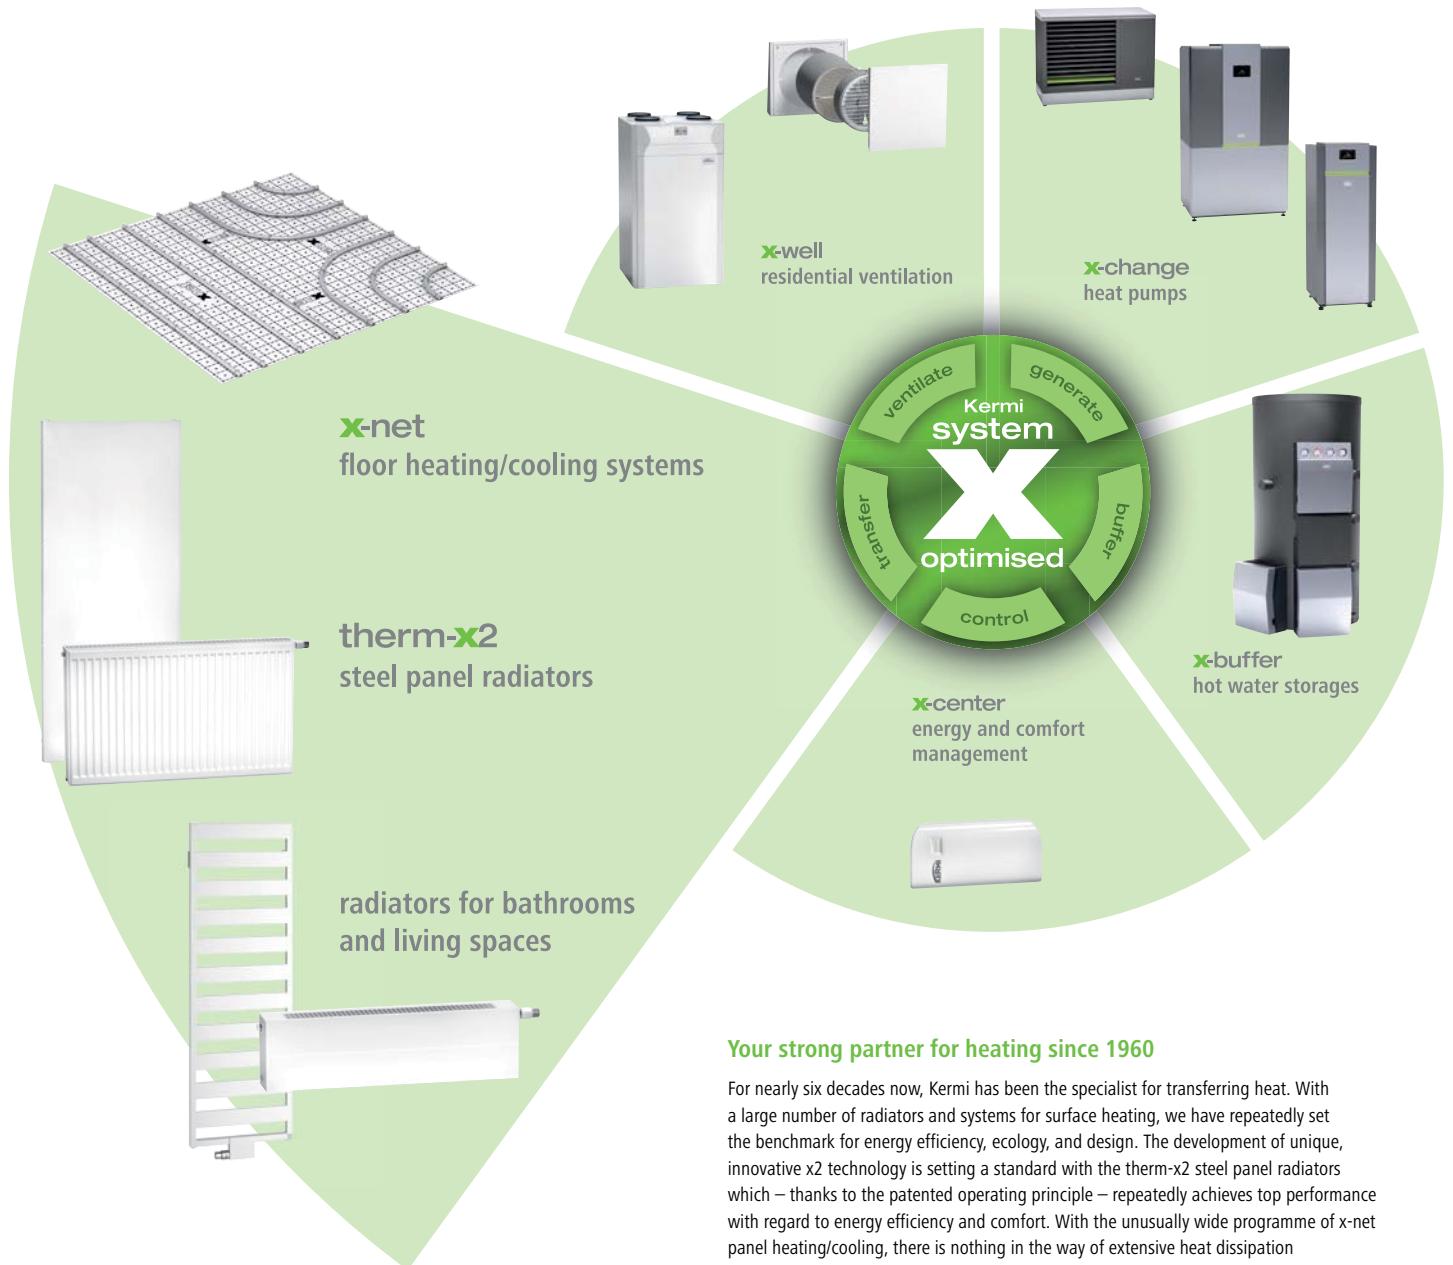


Your strong partner for heating since 1960

For nearly six decades now, Kermi has been the specialist for transferring heat. With a large number of radiators and systems for surface heating, we have repeatedly set the benchmark for energy efficiency, ecology, and design. The development of unique, innovative x2 technology is setting a standard with the therm-x2 steel panel radiators which – thanks to the patented operating principle – repeatedly achieves top performance with regard to energy efficiency and comfort. With the unusually wide programme of x-net panel heating/cooling, there is nothing in the way of extensive heat dissipation with a high proportion of radiant heat.

There is a wide range of bathroom and living room radiators to choose from. Convektors are high powered specialists for rooms with large window areas where they quickly provide cosy warmth. Heating panels score well with the high proportion of cosy radiant heat they produce. The aesthetic design of Kermi Decor round pipe radiators offers completely new options when designing your living space. And the customised styling and first-class workmanship make Kermi design radiators value-added design elements in bathrooms and living spaces. The designs beautifully complement modern architecture. Numerous models have won prestigious design awards.



Special version intended specifically for areas with an increased risk of corrosion, see Kermi colour concept.



therm-x2® Profile-K replacement (FK0D)

Prices incl. accessories/heat output

X = BH - 54 mm

Ordering example


Type 12

Type 22


Type 33

Type 12, 554 x 1200 mm =
Pr. cd. **FK012 D5 12**
Type 22, 554 x 800 mm =
Pr. cd. **FK022 D5 08**
Type 33, 954 x 600 mm =
Pr. cd. **FK033 D9 06**


For further information on
product code with detailed
ordering example, see page 94

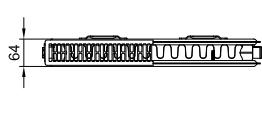

x2

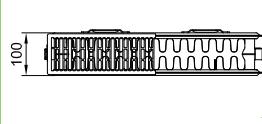

x2

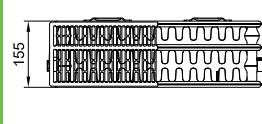

x2

Height (BH) mm	Heat output in watts/room temperature 20 °C						Selection guide for length	
	554	954	554	954	554	954		
Type 12, 554 x 1200 mm = Pr. cd. FK012 D5 12	double row with convector, Product code FK012D...		double row with two convectors, Product code FK022D...		triple row with three convectors, Product code FK033D...			
Type 22, 554 x 800 mm = Pr. cd. FK022 D5 08								
Type 33, 954 x 600 mm = Pr. cd. FK033 D9 06								
For further information on product code with detailed ordering example, see page 94								
Height (BH) mm	554	954	554	954	554	954	Selection guide for length	
Radiator exponent	1.2936	1.3077	1.2899	1.3068	1.2836	1.3069	Steel radiator	
Price per running m in EUR	261.12	395.93	259.11	446.78	393.38	690.90	50 mm	
Surcharge per unit in EUR watts/m ² 75/65/20 °C	71.81	100.03	108.10	146.65	159.10	215.33	60 mm	
	1153	1786	1564	2307	2103	3153	Length / element	
Length (BL) mm	Heat output in watts/room temperature 20 °C							
400	watts	70/55 °C	370	572	503	739	676	1010
		55/45 °C	236	364	321	470	433	642
	Price	EUR	176.26	258.40	211.74	325.36	316.45	491.69
8								
500	watts	70/55 °C	463	716	628	924	846	1263
		55/45 °C	296	455	401	587	542	803
	Price	EUR	202.37	298.00	237.66	370.04	355.79	560.78
10								
600	watts	70/55 °C	556	859	754	1109	1015	1516
		55/45 °C	355	545	482	704	650	963
	Price	EUR	228.48	337.59	263.57	414.72	395.13	629.87
12								
700	watts	70/55 °C	648	1002	880	1294	1184	1768
		55/45 °C	414	636	562	822	758	1124
	Price	EUR	254.59	377.18	289.48	459.40	434.47	698.96
14								
800	watts	70/55 °C	740	1145	1005	1478	1353	2021
		55/45 °C	472	727	642	939	866	1284
	Price	EUR	280.71	416.77	315.39	504.07	473.80	768.05
16								
900	watts	70/55 °C	833	1288	1131	1663	1522	2273
		55/45 °C	532	818	723	1057	975	1445
	Price	EUR	306.82	456.37	341.30	548.75	513.14	837.14
18								
1000	watts	70/55 °C	926	1431	1257	1848	1691	2526
		55/45 °C	591	909	803	1174	1083	1605
	Price	EUR	332.93	495.96	367.21	593.43	552.48	906.23
20								
1100	watts	70/55 °C	1018	1574	1382	2033	1860	2779
		55/45 °C	650	1000	883	1291	1191	1766
	Price	EUR	359.04	535.55	393.12	638.11	591.82	975.32
22								
1200	watts	70/55 °C	1111	1717	1508	2218	2029	3031
		55/45 °C	709	1091	964	1409	1300	1926
	Price	EUR	385.15	575.15	419.03	682.79	631.16	1044.41
24								
1300	watts	70/55 °C	1204	1860	1633	2402	2198	3284
		55/45 °C	768	1182	1044	1526	1408	2087
	Price	EUR	411.27	614.74	444.94	727.46	670.49	1113.50
26								
1400	watts	70/55 °C	1296	2003	1759	2587	2367	3536
		55/45 °C	827	1273	1124	1644	1516	2247
	Price	EUR	437.38	654.33	470.85	772.14	709.83	1182.59
28								
1600	watts	70/55 °C	1481	2290	2010	2957	2706	4042
		55/45 °C	945	1454	1285	1878	1733	2568
	Price	EUR	489.60	733.52	522.68	861.50	788.51	1320.77
32								
1800	watts	70/55 °C	1666	2576	2262	3326	3044	4547
		55/45 °C	1063	1636	1445	2113	1949	2889
	Price	EUR	541.83	812.70	574.50	950.85	867.18	1458.95
36								
2000	watts	70/55 °C	1852	2862	2513	3696	3382	5052
		55/45 °C	1182	1818	1606	2348	2166	3210
	Price	EUR	594.05	891.89	626.32	1040.21	945.86	1597.13
40								
2300	watts	70/55 °C	2129	3291	2890	4250	3889	5810
		55/45 °C	1359	2091	1847	2700	2491	3692
	Price	EUR	672.39	1010.67	704.05	1174.24	1063.87	1804.40
46								
2600	watts	70/55 °C	2407	3721	3267	4805	4397	6568
		55/45 °C	1536	2363	2088	3052	2816	4173
	Price	EUR	750.72	1129.45	781.79	1308.28	1181.89	2011.67
52								
3000	watts	70/55 °C	2777	4293	3770	5544	5073	7578
		55/45 °C	1772	2727	2409	3522	3249	4815
	Price	EUR	855.17	1287.82	885.43	1486.99	1339.24	2288.03
60								



Selection guide

Comparison table for DIN steel radiators

Height [mm]	Hub distance [mm]	Depth [mm]	Output	
			[watts/element] ¹⁾ 90/70/20 °C	[watts/element] ¹⁾ 70/55/20 °C
600	500	110	73	47 (45)
		160	99	63 (61)
		220	128	82 (78)
1000	900	110	122	78 (74)
		160	157	100 (96)
		220	204	130 (125)

¹⁾ Heat output of steel radiators according to DIN 4703 (DIN EN 442)

Comparison table for DIN cast iron radiators

Height [mm]	Hub distance [mm]	Depth [mm]	Output	
			[watts/element] ¹⁾ 90/70/20 °C	[watts/element] ¹⁾ 70/55/20 °C
580	500	70	68	43 (41)
		110	90	57 (56)
		160	126	80 (77)
980	900	220	162	103 (99)
		110	111	71 (68)
		160	204	130 (125)
		220	260	166 (159)

¹⁾ Heat output of cast iron radiators according to DIN 4703 (DIN EN 442)

To select the appropriate Kermi replacement radiator, just take the heat output per radiator element from the respective table and multiply by the number of elements of the radiator to be replaced.


Example

A DIN steel radiator of height 600 mm, depth 160 mm, with 20 elements is to be replaced. A design appropriate for a system temperature of 70/55 °C results in a total heat output of 20 elements x 63 watts/element equalling 1260 watts. The Profile compact replacement radiator selected as suitable for this purpose is: **Type 22, height 554 mm, length 1000 mm, total heat output 1257 watts.**

Note

This selection guide provides an approximation. The indicated outputs of the DIN steel and cast iron radiators are based on DIN 4703, those of the Kermi replacement radiator on DIN EN 442. Outputs of DIN steel and cast iron radiators according to DIN EN 442 are approx. 3 - 5 % lower depending on type.

Special version intended specifically for areas with an increased risk of corrosion, see Kermi colour concept.



therm-x2® Profile-V (FTV)


Ordering example

Type 10

Connection on right,
colour white
Type 10, 600 x 1000 mm =
Pr. cd. **FTV10 060 1001R2K**

For further information on
product code with detailed
ordering example, see page 95

Type 11



Type 11										Type 12											
single row, Product code FTV10...		single row with convector, Product code FTV11...								double row with convector, Product code FTV12...											
Height (BH) mm		300	400	500	600	750	900	300	400	500	600	750	900	300	400	500	600	750	900		
Radiator exponent		1.2361	1.2550	1.2739	1.2928	1.2932	1.2935	1.2196	1.2371	1.2546	1.2721	1.2883	1.3044	1.2731	1.2810	1.2889	1.2969	1.3156	1.3343		
Price per running m in EUR		77.08	82.33	88.86	96.68	121.50	141.09	122.83	126.77	144.99	152.86	185.50	218.17	175.05	202.52	207.77	227.30	262.60	295.23		
Surcharge per unit in EUR watts/m ² 75/65/20 °C		99.28	100.60	101.86	104.53	104.53	103.18	104.53	108.42	117.63	121.50	124.12	124.12	122.83	126.77	130.64	134.55	138.50	141.09		
		335	425	514	602	736	872	551	697	840	979	1185	1390	720	894	1063	1229	1475	1723		

Length (BL) mm

			Heat output in watts/room temperature 20 °C																				
			400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400
			watts	70/55 °C	55/45 °C	watts	70/55 °C	55/45 °C	watts	70/55 °C	55/45 °C	watts	70/55 °C	55/45 °C	watts	70/55 °C	55/45 °C	watts	70/55 °C	55/45 °C	watts	70/55 °C	55/45 °C
			130.11	133.53	137.40	143.20	153.13	159.62	153.66	159.13	175.63	182.64	198.32	211.39	192.85	207.78	213.75	225.47	243.54	259.18			
			137.82	141.77	146.29	152.87	165.28	173.73	165.95	171.81	190.13	197.93	216.87	233.21	210.36	228.03	234.53	248.20	269.80	288.71			
			145.53	150.00	155.18	162.54	177.43	187.83	178.23	184.48	204.62	213.22	235.42	255.02	227.86	248.28	255.30	270.93	296.06	318.23			
			153.24	158.23	164.06	172.21	189.58	201.94	190.51	197.16	219.12	228.50	253.97	276.84	245.37	268.53	276.08	293.66	322.32	347.75			
			160.94	166.46	172.95	181.87	201.73	216.05	202.79	209.84	233.62	243.79	272.52	298.66	262.87	288.79	296.86	316.39	348.58	377.27			
			168.65	174.70	181.83	191.54	213.88	230.16	215.08	222.51	248.12	259.07	291.07	320.47	280.38	309.04	317.63	339.12	374.84	406.80			
			176.36	182.93	190.72	201.21	226.03	244.27	227.36	235.19	262.62	274.36	309.62	342.29	297.88	329.29	338.41	361.85	401.10	436.32			
			184.07	191.16	199.61	210.88	238.18	258.38	239.64	247.87	277.12	289.65	328.17	364.11	315.39	349.54	359.19	384.58	427.36	465.84			
			191.78	199.40	208.49	220.55	250.33	272.49	251.93	260.54	291.62	304.93	346.72	385.92	332.89	369.79	379.96	407.31	453.62	495.37			
			199.48	207.63	217.38	230.21	262.48	286.60	264.21	273.22	306.12	320.22	365.27	407.74	350.40	390.05	400.74	430.04	479.88	524.89			
			207.19	215.86	226.26	239.88	274.63	300.71	276.49	285.90	320.62	335.50	383.82	429.56	367.90	410.30	421.52	452.77	506.14	554.41			
			222.61	232.33	244.04	259.22	298.93	328.92	301.06	311.25	349.61	366.08	420.92	473.19	402.91	450.80	463.07	498.23	558.66	613.46			
			238.02	248.79	261.81	278.55	323.23	357.14	325.62	336.61	378.61	396.65	458.02	516.83	437.92	491.31	504.63	543.69	611.18	672.50			
			253.44	265.26	279.58	297.89	347.53	385.36	350.19	361.96	407.61	427.22	495.12	560.46	472.93	531.81	546.18	589.15	663.70	731.55			
			276.56	289.96	306.24	326.89	383.98	427.69	387.04	399.99	451.11	473.08	550.77	625.91	525.45	592.57	608.51	657.34	742.48	820.12			
			299.69	314.66	332.90	355.90	420.43	470.01	423.89	438.02	494.60	518.94	606.42	691.36	577.96	653.32	670.84	725.53	821.26	908.69			
			330.52	347.59	368.44	394.57	469.03	526.45	473.02	488.73	552.60	580.08	680.62	778.63	647.98	734.33	753.95	816.45	926.30	1026.78			



Type 22		Type 33		Ordering example										
	x2		x2	Connection on left, colour white Type 12, 500 x 1200 mm= Pr. cd. FTV12 050 1201L2K										
double row with two convectors, Product code FTV22...		triple row with three convectors, Product code FTV33...												
200*	300	400	500	600	750	900	200*	300	400	500	600	750	900	Height (BH) mm
1.2828	1.2776	1.2827	1.2879	1.2930	1.3000	1.3069	1.2850	1.2671	1.2736	1.2801	1.2866	1.2967	1.3068	Radiator exponent
166.29	175.05	207.77	215.55	228.66	300.48	364.48	241.97	254.72	300.48	314.87	341.02	470.92	585.33	Price per running m in EUR
150.20	158.10	158.10	156.79	163.30	171.14	177.69	202.31	212.95	212.95	210.32	209.02	224.70	239.05	Surcharge per unit in EUR watts/m 75/65/20 °C
678	959	1207	1441	1666	1987	2295	998	1300	1633	1944	2236	2645	3023	
Heat output in watts/ room temperature 20 °C														Length (BL) mm
309	389	463	535	638	735		419	526	626	719	849	969		watts 70/55 °C 400
198	249	296	341	406	467		270	338	401	460	541	615		watts 55/45 °C
228.12	241.21	243.01	254.76	291.33	323.48		314.84	333.14	336.27	345.43	413.07	473.18		Price EUR
386	486	579	669	797	920		524	658	782	899	1062	1211		watts 70/55 °C 500
248	311	371	427	507	584		338	423	502	575	677	770		watts 55/45 °C
245.63	261.99	264.57	277.63	321.38	359.93		340.31	363.19	367.76	379.53	460.16	531.72		Price EUR
327	463	582	695	803	956	1103	481	629	790	938	1079	1274	1453	watts 70/55 °C 600
209	297	373	445	513	609	701	308	405	507	602	690	812	923	watts 55/45 °C
249.97	263.13	282.76	286.12	300.50	351.43	396.38	347.49	365.78	393.24	399.24	413.63	507.25	590.25	Price EUR
382	540	680	811	936	1116	1287	561	734	921	1095	1258	1486	1695	watts 70/55 °C 700
244	347	435	519	598	710	818	360	473	592	702	805	947	1077	watts 55/45 °C
266.60	280.64	303.54	307.68	323.36	381.48	432.83	371.69	391.25	423.29	430.73	447.73	554.34	648.78	Price EUR
436	618	777	927	1070	1275	1471	642	839	1052	1251	1438	1698	1937	watts 70/55 °C 800
279	396	498	593	683	812	934	411	540	676	802	920	1082	1231	watts 55/45 °C
283.23	298.14	324.32	329.23	346.23	411.52	469.27	395.89	416.73	453.33	462.22	481.84	601.44	707.31	Price EUR
491	695	874	1042	1204	1434	1655	722	944	1184	1408	1617	1911	2180	watts 70/55 °C 900
314	446	560	667	768	913	1051	463	608	761	903	1035	1218	1385	watts 55/45 °C
299.86	315.65	345.09	350.79	369.09	441.57	505.72	420.08	442.20	483.38	493.70	515.94	648.53	765.85	Price EUR
545	772	971	1158	1338	1594	1839	802	1048	1316	1564	1797	2123	2422	watts 70/55 °C 1000
349	495	622	741	854	1015	1168	514	675	845	1003	1150	1353	1539	watts 55/45 °C
316.49	333.15	365.87	372.34	391.96	471.62	542.17	444.28	467.67	513.43	525.19	550.04	695.62	824.38	Price EUR
600	849	1068	1274	1472	1753	2023	882	1153	1447	1721	1977	2335	2664	watts 70/55 °C 1100
384	545	684	815	940	1116	1285	565	743	930	1103	1265	1488	1692	watts 55/45 °C
333.12	350.66	386.65	393.90	414.83	501.67	578.62	468.48	493.14	543.48	556.68	584.14	742.71	882.91	Price EUR
654	927	1165	1390	1605	1913	2206	962	1258	1579	1877	2157	2548	2906	watts 70/55 °C 1200
419	595	746	889	1025	1218	1402	617	810	1015	1204	1380	1624	1846	watts 55/45 °C
349.75	368.16	407.42	415.45	437.69	531.72	615.07	492.67	518.61	573.53	588.16	618.24	789.80	941.45	Price EUR
709	1004	1262	1505	1739	2072	2390	1043	1363	1710	2034	2337	2760	3148	watts 70/55 °C 1300
454	644	809	963	1110	1319	1519	668	878	1099	1304	1495	1759	2000	watts 55/45 °C
366.38	385.67	428.20	437.01	460.56	561.76	651.51	516.87	544.09	603.57	619.65	652.35	836.90	999.98	Price EUR
763	1081	1359	1621	1873	2231	2574	1123	1468	1842	2191	2516	2972	3390	watts 70/55 °C 1400
489	694	871	1037	1195	1421	1635	720	945	1184	1405	1610	1894	2154	watts 55/45 °C
383.01	403.17	448.98	458.56	483.42	591.81	687.96	541.07	569.56	633.62	651.14	686.45	883.99	1058.51	Price EUR
872	1235	1553	1853	2141	2550	2942	1283	1678	2105	2503	2876	3397	3875	watts 70/55 °C 1600
558	793	995	1185	1367	1624	1869	822	1081	1353	1605	1840	2165	2462	watts 55/45 °C
416.26	438.18	490.53	501.67	529.16	651.91	760.86	589.46	620.50	693.72	714.11	754.65	978.17	1175.58	Price EUR
981	1390	1748	2085	2408	2869	3309	1444	1887	2368	2816	3236	3821	4359	watts 70/55 °C 1800
628	892	1120	1333	1537	1827	2102	925	1216	1522	1806	2070	2435	2769	watts 55/45 °C
449.52	473.19	532.09	544.78	574.89	712.00	833.75	637.86	671.45	753.81	777.09	822.86	1072.36	1292.64	Price EUR
1090	1544	1942	2316	2676	3188	3677	1604	2097	2631	3129	3595	4246	4844	watts 70/55 °C 2000
698	991	1244	1481	1708	2030	2336	1028	1351	1691	2006	2300	2706	3077	watts 55/45 °C
482.78	508.20	573.64	587.89	620.62	772.10	906.65	686.25	722.39	813.91	840.06	891.06	1166.54	1409.71	Price EUR
1254	1776	2233	2663	3077	3666	4229	1845	2412	3026	3598	4134	4883	5570	watts 70/55 °C 2300
803	1140	1431	1703	1964	2334	2687	1182	1553	1945	2307	2645	3112	3539	watts 55/45 °C
532.67	560.72	635.97	652.56	689.22	862.24	1015.99	758.84	798.81	904.05	934.52	993.37	1307.82	1585.31	Price EUR
1417	2007	2524	3011	3479	4144	4780	2085	2726	3421	4067	4674	5520	6297	watts 70/55 °C 2600
907	1288	1617	1926	2221	2639	3037	1336	1756	2198	2608	2990	3518	4000	watts 55/45 °C
582.55	613.23	698.30	717.22	757.82	952.39	1125.34	831.43	875.22	994.20	1028.98	1095.67	1449.09	1760.91	Price EUR
1635	2316	2913	3474	4013	4781	5516	2406	3145	3947	4693	5392	6369	7265	watts 70/55 °C 3000
1047	1486	1866	2222	2562	3045	3504	1542	2026	2536	3009	3450	4059	4616	watts 55/45 °C
649.07	683.25	781.41	803.44	849.28	1072.58	1271.13	928.22	977.11	1114.39	1154.93	1232.08	1637.46	1995.04	Price EUR

Special version intended specifically for areas with an increased risk of corrosion, see Kermi colour concept.

* Height 200 mm without fixing accessories in the scope of delivery, without lugs, without x2 technology.

Type 22						Type 33						Ordering example		
 x2						 x2						Valve on left, colour white Type 12, 500 x 1200 mm = Pr. cd. FTP12 050 1201L2K		
double row with two convectors, Product code FTP22...						triple row with three convectors, Product code FTP33...								
300	400	500	600	750	900	300	400	500	600	750	900	Height (BH) mm		
1.2776	1.2827	1.2879	1.2930	1.3000	1.3069	1.2671	1.2736	1.2801	1.2866	1.2967	1.3068	Radiator exponent		
183.80	218.16	226.33	240.08	315.51	382.72	267.46	315.51	330.60	358.07	494.45	614.59	Price per running m in EUR		
166.01	166.01	164.63	171.47	179.71	186.58	223.61	223.61	220.84	219.45	235.95	251.01	Surcharge per unit in EUR		
959	1207	1441	1666	1987	2295	1300	1633	1944	2236	2645	3023	Length 400 - 1600 from length 1800		
												watts/m 75/65/20 °C		
309	389	463	535	638	735	419	526	626	719	849	969	Length (BL) mm		
198	249	296	341	406	467	270	338	401	460	541	615	watts	70/55 °C	400
239.53	253.27	255.16	267.50	305.91	339.67	330.59	349.81	353.08	362.68	433.73	496.85	55/45 °C		
386	486	579	669	797	920	524	658	782	899	1062	1211	watts	70/55 °C	500
248	311	371	427	507	584	338	423	502	575	677	770	55/45 °C		
257.91	275.09	277.80	291.51	337.47	377.94	357.34	381.37	386.14	398.49	483.18	558.31	Price	EUR	
463	582	695	803	956	1103	629	790	938	1079	1274	1453	watts	70/55 °C	600
297	373	445	513	609	701	405	507	602	690	812	923	55/45 °C		
276.29	296.91	300.43	315.52	369.02	416.21	384.09	412.92	419.20	434.29	532.62	619.76	Price	EUR	
540	680	811	936	1116	1287	734	921	1095	1258	1486	1695	watts	70/55 °C	700
347	435	519	598	710	818	473	592	702	805	947	1077	55/45 °C		
294.67	318.72	323.06	339.53	400.57	454.48	410.83	444.47	452.26	470.10	582.07	681.22	Price	EUR	
618	777	927	1070	1275	1471	839	1052	1251	1438	1698	1937	watts	70/55 °C	800
396	498	593	683	812	934	540	676	802	920	1082	1231	55/45 °C		
313.05	340.54	345.69	363.53	432.12	492.76	437.58	476.02	485.32	505.91	631.51	742.68	Price	EUR	
695	874	1042	1204	1434	1655	944	1184	1408	1617	1911	2180	watts	70/55 °C	900
446	560	667	768	913	1051	608	761	903	1035	1218	1385	55/45 °C		
331.43	362.35	368.33	387.54	463.67	531.03	464.32	507.57	518.38	541.71	680.96	804.14	Price	EUR	
772	971	1158	1338	1594	1839	1048	1316	1564	1797	2123	2422	watts	70/55 °C	1000
495	622	741	854	1015	1168	675	845	1003	1150	1353	1539	55/45 °C		
349.81	384.17	390.96	411.55	495.22	569.30	491.07	539.12	551.44	577.52	730.40	865.60	Price	EUR	
849	1068	1274	1472	1753	2023	1153	1447	1721	1977	2335	2664	watts	70/55 °C	1100
545	684	815	940	1116	1285	743	930	1103	1265	1488	1692	55/45 °C		
368.19	405.99	413.59	435.56	526.77	607.07	517.82	570.67	584.50	613.33	779.85	927.06	Price	EUR	
927	1165	1390	1605	1913	2206	1258	1579	1877	2157	2548	2906	watts	70/55 °C	1200
595	746	889	1025	1218	1402	810	1015	1204	1380	1624	1846	55/45 °C		
386.57	427.80	436.23	459.57	558.32	645.84	544.56	602.22	617.56	649.13	829.29	988.52	Price	EUR	
1004	1262	1505	1739	2072	2390	1363	1710	2034	2337	2760	3148	watts	70/55 °C	1300
644	809	963	1110	1319	1519	878	1099	1304	1495	1759	2000	55/45 °C		
404.95	449.62	458.86	483.57	589.87	684.12	571.31	633.77	650.62	684.94	878.74	1049.98	Price	EUR	
1081	1359	1621	1873	2231	2574	1468	1842	2191	2516	2972	3390	watts	70/55 °C	1400
694	871	1037	1195	1421	1635	945	1184	1405	1610	1894	2154	55/45 °C		
423.33	471.43	481.49	507.58	621.42	722.39	598.05	665.32	683.68	720.75	928.18	1111.44	Price	EUR	
1235	1553	1853	2141	2550	2942	1678	2105	2503	2876	3397	3875	watts	70/55 °C	1600
793	995	1185	1367	1624	1869	1081	1353	1605	1840	2165	2462	55/45 °C		
460.09	515.07	526.76	555.60	684.53	798.93	651.55	728.43	749.80	792.36	1027.07	1234.35	Price	EUR	
1390	1748	2085	2408	2869	3309	1887	2368	2816	3236	3821	4359	watts	70/55 °C	1800
892	1120	1333	1537	1827	2102	1216	1522	1806	2070	2435	2769	55/45 °C		
496.85	558.70	572.02	603.61	747.63	875.48	705.04	791.53	815.92	863.98	1125.96	1357.27	Price	EUR	
1544	1942	2316	2676	3188	3677	2097	2631	3129	3595	4246		watts	70/55 °C	2000
991	1244	1481	1708	2030	2336	1351	1691	2006	2300	2706		55/45 °C		
533.61	602.33	617.29	651.63	810.73	952.02	758.53	854.63	882.04	935.59	1224.85		Price	EUR	
1776	2233	2663	3077			2412	3026	3598	4134			watts	70/55 °C	2300
1140	1431	1703	1964			1553	1945	2307	2645			55/45 °C		
588.75	667.78	685.19	723.65			838.77	949.28	981.22	1043.01			Price	EUR	
2007	2524	3011	3479			2726						watts	70/55 °C	2600
1288	1617	1926	2221			1756						55/45 °C		
643.89	733.23	753.09	795.68			919.01						Price	EUR	3000

Special version intended specifically for areas with an increased risk of corrosion, see Kermi colour concept.

Type 22



x2

double row with two convectors,
Product code PK022...

205*	305	405	505	605	905
1.2704	1.3061	1.3104	1.3146	1.3189	1.3330
243.42	256.25	285.98	308.00	332.62	539.68
118.02	124.23	129.42	151.39	160.52	187.65
653	902	1125	1339	1549	2164

Type 33



x2

triple row with three convectors,
Product code PK033...

205*	305	405	505	605	905
1.2699	1.2657	1.2710	1.2763	1.2816	1.3146
408.21	429.68	486.62	535.74	555.17	834.71
172.11	181.17	185.05	183.75	198.04	198.04
971	1256	1599	1918	2215	2989

Ordering example

Type 12, 505 x 1205 mm =

Pr. cd. **PK012 05 12W02**

Type 22, 605 x 805 mm =

Pr. cd. **PK022 06 08W02**

Height (BH) mm

Radiator exponent

Price per running m in EUR

Surcharge per unit in EUR

watts/m 75/65/20 °C

Length (BL) mm

watts 70/55 °C 405

55/45 °C

Price EUR 505

watts 70/55 °C 505

55/45 °C

Price EUR 605

watts 70/55 °C 605

55/45 °C

Price EUR 705

watts 70/55 °C 705

55/45 °C

Price EUR 805

watts 70/55 °C 805

55/45 °C

Price EUR 905

watts 70/55 °C 905

55/45 °C

Price EUR 1005

watts 70/55 °C 1005

55/45 °C

Price EUR 1105

watts 70/55 °C 1105

55/45 °C

Price EUR 1205

watts 70/55 °C 1205

55/45 °C

Price EUR 1305

watts 70/55 °C 1305

55/45 °C

Price EUR 1405

watts 70/55 °C 1405

55/45 °C

Price EUR 1605

watts 70/55 °C 1605

55/45 °C

Price EUR 1805

watts 70/55 °C 1805

55/45 °C

Price EUR 2005

watts 70/55 °C 2005

55/45 °C

Price EUR 2305

watts 70/55 °C 2305

55/45 °C

Price EUR 2605

watts 70/55 °C 2605

55/45 °C

Price EUR 3005

watts 70/55 °C 3005

55/45 °C


Price EUR

Special version intended specifically for areas with an increased risk of corrosion, see Kermi colour concept.

* Height 200 mm without fixing accessories in the scope of delivery, without lugs, without x2 technology.



Special version intended specifically for areas with an increased risk of corrosion, see Kermi colour concept.



therm-x2® Plan-K replacement (PK0D)

Prices incl. accessories/heat output

X = BH - 59 mm

Ordering example


Type 12

Type 22

Type 33

Type 12, 559 x 1205 mm =
Pr. cd. **PK012 D5 12**
Type 22, 559 x 805 mm =
Pr. cd. **PK022 D5 08**

For further information on
product code with detailed
ordering example, see page 94



x2



x2



x2

Height (BH) mm	Heat output in watts/room temperature 20 °C						Selection guide for length		
	watts	70/55 °C	55/45 °C	watts	70/55 °C	55/45 °C	Steel radiator	Steel radiator	
405	watts	70/55 °C	55/45 °C	334	547	470	718	679	1006
				211	350	298	456	435	635
	Price	EUR		264.34	357.45	289.33	430.46	416.85	562.00
505	watts	70/55 °C	55/45 °C	417	682	587	895	846	1254
				263	436	372	568	543	791
	Price	EUR		293.86	408.54	321.78	488.72	472.02	651.38
605	watts	70/55 °C	55/45 °C	499	817	703	1072	1013	1503
				315	523	445	681	650	948
	Price	EUR		323.38	459.63	354.23	546.99	527.20	740.77
705	watts	70/55 °C	55/45 °C	582	952	819	1249	1181	1751
				367	609	518	793	757	1105
	Price	EUR		352.89	510.72	386.68	605.26	582.37	830.16
805	watts	70/55 °C	55/45 °C	665	1088	936	1426	1348	2000
				419	696	592	906	865	1261
	Price	EUR		382.41	561.81	419.12	663.53	637.54	919.55
905	watts	70/55 °C	55/45 °C	748	1223	1052	1604	1516	2248
				471	782	666	1018	972	1418
	Price	EUR		411.93	612.90	451.57	721.80	692.72	1008.93
1005	watts	70/55 °C	55/45 °C	830	1358	1168	1781	1683	2496
				523	868	739	1131	1079	1575
	Price	EUR		441.45	663.99	484.02	780.06	747.89	1098.32
1105	watts	70/55 °C	55/45 °C	913	1493	1284	1958	1851	2745
				575	955	813	1243	1187	1732
	Price	EUR		470.96	715.09	516.47	838.33	803.06	1187.71
1205	watts	70/55 °C	55/45 °C	995	1628	1400	2135	2019	2993
				627	1041	887	1356	1295	1888
	Price	EUR		500.48	766.18	548.92	896.60	858.23	1277.09
1305	watts	70/55 °C	55/45 °C	1078	1763	1516	2312	2186	3242
				679	1128	960	1468	1402	2045
	Price	EUR		530.00	817.27	581.37	954.87	913.41	1366.48
1405	watts	70/55 °C	55/45 °C	1160	1898	1632	2490	2353	3490
				731	1214	1033	1581	1510	2202
	Price	EUR		559.51	868.36	613.82	1013.14	968.58	1455.87
1605	watts	70/55 °C	55/45 °C	1325	2168	1865	2844	2688	3987
				835	1387	1181	1806	1724	2515
	Price	EUR		618.55	970.54	678.72	1129.67	1078.93	1634.64
1805	watts	70/55 °C	55/45 °C	1490	2439	2098	3198	3023	4484
				939	1560	1328	2031	1939	2828
	Price	EUR		677.58	1072.72	743.61	1246.21	1189.27	1813.42
2005	watts	70/55 °C	55/45 °C	1656	2709	2330	3553	3358	4980
				1043	1732	1475	2256	2154	3142
	Price	EUR		736.62	1174.90	808.51	1362.74	1299.62	1992.19
2305	watts	70/55 °C	55/45 °C	1904	3114	2678	4084	3861	5726
				1199	1992	1696	2593	2476	3612
	Price	EUR		825.17	1328.18	905.86	1537.55	1465.14	2260.35
2605	watts	70/55 °C	55/45 °C	2151	3519	3027	4616	4363	6471
				1355	2251	1916	2931	2799	4082
	Price	EUR		913.72	1481.45	1003.21	1712.35	1630.66	2528.51
3005	watts	70/55 °C	55/45 °C	2481	4060	3492	5325	5033	7464
				1563	2596	2210	3381	3228	4709
	Price	EUR		1031.79	1685.81	1133.00	1945.42	1851.35	2886.06



Hub distance 350 mm (height 405 mm)

For therm-x2 Plan compact radiator table, see page 22

Selection guide

Comparison table for DIN steel radiators

Height [mm]	Hub distance [mm]	Depth [mm]	Output	
			[watts/element] ¹⁾ 90/70/20 °C	[watts/element] ¹⁾ 70/55/20 °C
600	500	110	73	47 (45)
		160	99	63 (61)
		220	128	82 (78)
1000	900	110	122	78 (74)
		160	157	100 (96)
		220	204	130 (125)

¹⁾ Heat output of steel radiators according to DIN 4703 (DIN EN 442)

Comparison table for DIN cast iron radiators

Height [mm]	Hub distance [mm]	Depth [mm]	Output	
			[watts/element] ¹⁾ 90/70/20 °C	[watts/element] ¹⁾ 70/55/20 °C
580	500	70	68	43 (41)
		110	90	57 (56)
		160	126	80 (77)
980	900	220	162	103 (99)
		110	111	71 (68)
		160	204	130 (125)
		220	260	166 (159)

¹⁾ Heat output of cast iron radiators according to DIN 4703 (DIN EN 442)

To select the appropriate Kermi replacement radiator, just take the heat output per radiator element from the respective table and multiply by the number of elements of the radiator to be replaced.

Example

A DIN steel radiator of height 600 mm, depth 160 mm with 18 elements is to be replaced. A design appropriate for a system temperature of 70/55 °C results in a total heat output of 18 elements x 63 watts / element equalling 1134 watts.

The Plan compact replacement radiator selected as suitable for this purpose is: **Type 22, height 559 mm, length 1005 mm, total heat output 1168 watts.**

Note

This selection guide provides an approximation. The indicated outputs of the DIN steel and cast iron radiators are based on DIN 4703, those of the Kermi replacement radiator on DIN EN 442. Outputs of DIN steel and cast iron radiators according to DIN EN 442 are approx. 3 - 5 % lower depending on type.

Special version intended specifically for areas with an increased risk of corrosion, see Kermi colour concept.


Type 22					Type 33					Ordering example				
 x2					 x2					Valve on left, colour white Type 12, 505 x 1205 mm = Pr. cd. PTP12 050 1201L2K				
double row with two convectors, Product code PTP22...					triple row with three convectors, Product code PTP33...									
305	405	505	605	905	305	405	505	605	905	Height (BH) mm	Radiator exponent	Price per running m in EUR	Surcharge per unit in EUR	Length 400 - 1600 from length 1800
1.3061	1.3104	1.3146	1.3189	1.3330	1.2657	1.2710	1.2763	1.2816	1.3146					
242.80	274.34	296.32	320.99	515.81	408.80	465.03	513.02	532.27	798.35					
218.16	222.22	242.80	252.43	278.47	273.00	275.74	274.34	285.34	285.34					
902	1125	1339	1549	2164	1256	1599	1918	2215	2989					watts/m 75/65/20 °C
Heat output in watts/room temperature 20 °C														
292	365	434	501	699	411	522	626	722	969					Length (BL) mm
186	232	275	317	440	265	336	402	463	614	watts	70/55 °C	405		
316.49	333.33	362.81	382.43	487.37	438.56	464.08	482.11	500.91	608.67	55/45 °C				
365	455	541	625	872	511	650	780	900	1207	Price	EUR			
232	289	343	396	549	330	418	501	577	765	watts	70/55 °C	505		
340.77	360.76	392.44	414.53	538.95	479.44	510.58	533.42	554.14	688.51	55/45 °C				
437	545	648	749	1044	613	779	934	1078	1446	Price	EUR			
278	346	411	474	657	395	501	600	691	916	watts	70/55 °C	605		
365.05	388.20	422.07	446.63	590.54	520.32	557.08	584.72	607.36	768.34	55/45 °C				
510	635	755	873	1217	714	908	1089	1257	1686	Price	EUR			
324	403	479	552	766	460	584	699	805	1068	watts	70/55 °C	705		
389.33	415.63	451.71	478.73	642.12	561.20	603.59	636.02	660.59	848.18	55/45 °C				
582	725	862	997	1389	816	1037	1243	1435	1925	Price	EUR			
370	460	546	631	875	526	667	798	919	1220	watts	70/55 °C	805		
413.61	443.06	481.34	510.83	693.70	602.08	650.09	687.32	713.82	928.01	55/45 °C				
654	815	970	1121	1562	917	1166	1398	1613	2164	Price	EUR			
415	517	614	709	983	591	750	898	1034	1371	watts	70/55 °C	905		
437.89	470.50	510.97	542.93	745.28	642.96	696.59	738.62	767.04	1007.85	55/45 °C				
727	906	1077	1245	1735	1018	1295	1553	1791	2403	Price	EUR			
462	575	682	787	1092	656	833	997	1148	1523	watts	70/55 °C	1005		
462.17	497.93	540.60	575.02	796.86	683.84	743.10	789.93	820.27	1087.68	55/45 °C				
799	995	1184	1369	1907	1120	1424	1706	1970	2643	Price	EUR			
508	631	750	866	1201	722	916	1096	1262	1674	watts	70/55 °C	1105		
486.45	525.37	570.23	607.12	848.44	724.72	789.60	841.23	873.50	1167.52	55/45 °C				
871	1086	1290	1493	2080	1221	1553	1861	2147	2882	Price	EUR			
553	689	818	944	1309	787	999	1195	1376	1826	watts	70/55 °C	1205		
510.73	552.80	599.87	639.22	900.02	765.60	836.10	892.53	926.73	1247.35	55/45 °C				
943	1175	1398	1616	2252	1322	1682	2016	2326	3121	Price	EUR			
599	746	886	1022	1418	852	1082	1294	1491	1977	watts	70/55 °C	1305		
535.01	580.23	629.50	671.32	951.60	806.48	882.60	943.83	979.95	1327.19	55/45 °C				
1015	1266	1505	1740	2425	1424	1811	2170	2504	3360	Price	EUR			
645	803	953	1101	1526	918	1165	1393	1605	2129	watts	70/55 °C	1405		
559.29	607.67	659.13	703.42	1003.18	847.36	929.11	995.13	1033.18	1407.02	55/45 °C				
1160	1446	1719	1987	2770	1626	2068	2479	2860	3838	Price	EUR			
737	917	1089	1257	1744	1048	1330	1591	1833	2432	watts	70/55 °C	1605		
607.85	662.54	718.39	767.62	1106.35	929.12	1022.11	1097.74	1139.63	1566.69	55/45 °C				
1304	1626	1934	2235	3115	1829	2326	2788	3217	4316	Price	EUR			
829	1032	1225	1414	1961	1179	1496	1790	2061	2735	watts	70/55 °C	1805		
656.41	717.40	777.66	831.82	1209.51	1010.88	1115.12	1200.34	1246.09	1726.36	55/45 °C				
1449	1806	2148	2483	3461	2031	2584	3097	3573		Price	EUR			
921	1146	1361	1571	2179	1309	1662	1988	2290		watts	70/55 °C	2005		
704.97	772.27	836.92	896.01	1312.67	1092.64	1208.13	1302.95	1352.54		55/45 °C				
1666	2076	2469	2854		2335	2971	3560	4108		Price	EUR			
1058	1317	1564	1806		1505	1911	2286	2633		watts	70/55 °C	2305		
777.81	854.57	925.82	992.31		1215.28	1347.63	1456.85	1512.22		55/45 °C				
1883	2347	2791	3226		2640					Price	EUR			
1196	1489	1768	2041		1701					watts	70/55 °C	2605		
850.65	936.88	1014.71	1088.61		1337.92					Price	EUR			
										watts	70/55 °C	3005		
										Price	EUR			

Special version intended specifically for areas with an increased risk of corrosion, see Kermi colour concept.



Line radiators

Special version intended specifically for areas with an increased risk of corrosion, see Kermi colour concept.



therm-x2® Line-K replacement (PLK)

Prices incl. accessories/heat output

Ordering example


Type 12

Type 22


Type 33

Type 12, 559 x 1205 mm =
Pr. cd. **PLK12 055 1201N2K**
Type 22, 559 x 805 mm =
Pr. cd. **PLK22 055 0801N2K**


For further information on
product code with detailed
ordering example, see page 95

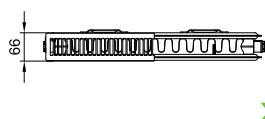

x2

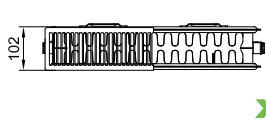

x2

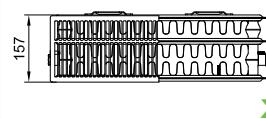

x2

Height (BH) mm	Heat output in watts/room temperature 20 °C						Selection guide for length
	559	959	559	959	559	959	
Radiator exponent	1.3307	1.2898	1.3169	1.3088	1.2792	1.3267	Steel radiator
Price per running m in EUR	324.69	562.01	356.93	640.96	606.91	983.28	50 mm
Surcharge per unit in EUR watts/m² 75/65/20 °C	159.27	165.59	173.69	213.91	212.74	219.98	Length / element
	1035	1682	1453	2213	2081	3111	
Length (BL) mm	Heat output in watts/room temperature 20 °C						
405	watts 70/55 °C 55/45 °C	334 211	547 350	470 298	718 456	679 435	1006 635
	Price EUR	290.77	393.20	318.25	473.50	458.54	618.21
8							
505	watts 70/55 °C 55/45 °C	417 263	682 436	587 372	895 568	846 543	1254 791
	Price EUR	323.24	449.41	353.94	537.59	519.23	716.54
10							
605	watts 70/55 °C 55/45 °C	499 315	817 523	703 445	1072 681	1013 650	1503 948
	Price EUR	355.71	505.61	389.63	601.69	579.92	814.86
12							
705	watts 70/55 °C 55/45 °C	582 367	952 609	819 518	1249 793	1181 757	1751 1105
	Price EUR	388.18	561.81	425.33	665.79	640.61	913.19
14							
805	watts 70/55 °C 55/45 °C	665 419	1088 696	936 592	1426 906	1348 865	2000 1261
	Price EUR	420.65	618.01	461.02	729.88	701.30	1011.52
16							
905	watts 70/55 °C 55/45 °C	748 471	1223 782	1052 666	1604 1018	1516 972	2248 1418
	Price EUR	453.11	674.21	496.71	793.98	761.99	1109.85
18							
1005	watts 70/55 °C 55/45 °C	830 523	1358 868	1168 739	1781 1131	1683 1079	2496 1575
	Price EUR	485.58	730.41	532.40	858.07	822.68	1208.18
20							
1105	watts 70/55 °C 55/45 °C	913 575	1493 955	1284 813	1958 1243	1851 1187	2745 1732
	Price EUR	518.05	786.61	568.10	922.17	883.38	1306.50
22							
1205	watts 70/55 °C 55/45 °C	995 627	1628 1041	1400 887	2135 1356	2019 1295	2993 1888
	Price EUR	550.52	842.81	603.79	986.27	944.07	1404.83
24							
1305	watts 70/55 °C 55/45 °C	1078 679	1763 1128	1516 960	2312 1468	2186 1402	3242 2045
	Price EUR	582.99	899.01	639.48	1050.36	1004.76	1503.16
26							
1405	watts 70/55 °C 55/45 °C	1160 731	1898 1214	1632 1033	2490 1581	2353 1510	3490 2202
	Price EUR	615.46	955.21	675.18	1114.46	1065.45	1601.49
28							
1605	watts 70/55 °C 55/45 °C	1325 835	2168 1387	1865 1181	2844 1806	2688 1724	3987 2515
	Price EUR	680.40	1067.62	746.56	1242.65	1186.83	1798.14
32							
1805	watts 70/55 °C 55/45 °C	1490 939	2439 1560	2098 1328	3198 2031	3023 1939	4484 2828
	Price EUR	745.34	1180.02	817.95	1370.84	1308.21	1994.80
36							
2005	watts 70/55 °C 55/45 °C	1656 1043	2709 1732	2330 1475	3553 2256	3358 2154	4980 3142
	Price EUR	810.27	1292.42	889.33	1499.03	1429.59	2191.46
40							
2305	watts 70/55 °C 55/45 °C	1904 1199	3114 1992	2678 1696	4084 2593	3861 2476	5726 3612
	Price EUR	907.68	1461.02	996.41	1691.32	1611.67	2486.44
46							
2605	watts 70/55 °C 55/45 °C	2151 1355	3519 2251	3027 1916	4616 2931	4363 2799	6471 4082
	Price EUR	1005.09	1629.63	1103.49	1883.61	1793.74	2781.42
52							
3005	watts 70/55 °C 55/45 °C	2481 1563	4060 2596	3492 2210	5325 3381	5033 3228	7464 4709
	Price EUR	1134.96	1854.43	1246.26	2139.99	2036.50	3174.74
60							
50							



Hub distance 350 mm (height 405 mm)

For therm-x2 Line compact radiator table, see page 34

Selection guide

Comparison table for DIN steel radiators

Height [mm]	Hub distance [mm]	Depth [mm]	Output	
			[watts/element] ¹⁾ 90/70/20 °C	[watts/element] ¹⁾ 70/55/20 °C
600	500	110	73	47 (45)
		160	99	63 (61)
		220	128	82 (78)
1000	900	110	122	78 (74)
		160	157	100 (96)
		220	204	130 (125)

¹⁾ Heat output of steel radiators according to DIN 4703 (DIN EN 442)

Comparison table for DIN cast iron radiators

Height [mm]	Hub distance [mm]	Depth [mm]	Output	
			[watts/element] ¹⁾ 90/70/20 °C	[watts/element] ¹⁾ 70/55/20 °C
580	500	70	68	43 (41)
		110	90	57 (56)
		160	126	80 (77)
980	900	220	162	103 (99)
		110	111	71 (68)
		160	204	130 (125)
		220	260	166 (159)

¹⁾ Heat output of cast iron radiators according to DIN 4703 (DIN EN 442)

To select the appropriate Kermi replacement radiator, just take the heat output per radiator element from the respective table and multiply by the number of elements of the radiator to be replaced.

Example


A DIN steel radiator of height 600 mm, depth 160 mm with 18 elements is to be replaced. A design appropriate for a system temperature of 70/55 °C results in a total heat output of 18 elements x 63 watts / element equalling 1134 watts.

The Line compact replacement radiator selected as suitable for this purpose is: **Type 22, height 559 mm, length 1005 mm, total heat output 1168 watts.**

Note

This selection guide provides an approximation. The indicated outputs of the DIN steel and cast iron radiators are based on DIN 4703, those of the Kermi replacement radiator on DIN EN 442. Outputs of DIN steel and cast iron radiators according to DIN EN 442 are approx. 3 - 5 % lower depending on type.

Special version intended specifically for areas with an increased risk of corrosion, see Kermi colour concept.



therm-x2® Line-V (PLV)


Ordering example

Type 10

Connection on right,
colour white
Type 10, 605 x 705 mm=
Pr. cd. PLV10 060 0701R2K



Type 11



Type 12



x2

For further information on
product code with detailed
ordering example, see page 95

single row,
Product code PLV10...

305 405 505 605 905

1.2923 1.2932 1.2940 1.2949 1.2894

162.35 165.28 168.14 172.47 231.36

195.47 198.30 199.75 206.93 199.75

288 369 447 524 747

487 619 749 878 1265

single row with convector,
Product code PLV11...

305 405 505 605 905

1.2766 1.2785 1.2805 1.2824 1.2871

179.63 195.47 217.00 239.99 329.08

189.69 196.87 208.37 204.05 204.05

221.34 229.91 239.99 250.04 250.04

657 805 954 1106 1599

double row with convector,
Product code PLV12...

305 405 505 605 905

1.3125 1.3197 1.3268 1.3340 1.3383

237.11 250.04 270.10 313.23 477.14

221.34 229.91 239.99 250.04 250.04


657 805 954 1106 1599

Length (BL) mm

Heat output in watts / room temperature 20 °C

Height (BH) mm		405					505					605					905					
		watts	70/55 °C	94	120	145	170	243	watts	70/55 °C	159	202	244	286	412	watts	70/55 °C	213	261	308	357	516
		55/45 °C		60	76	93	109	156	55/45 °C		102	130	156	183	263	55/45 °C		135	165	194	225	324
405	Price EUR	261.22	265.24	267.85	276.78	293.45	262.44	276.04	296.26	301.25	337.33	317.37	331.18	349.38	376.90	443.28	408.22	491.00				
505	Price EUR	277.46	281.77	284.66	294.03	316.59	280.40	295.58	317.96	325.24	370.24	341.08	356.18	376.39	408.22	491.00	325	385	446	643		
605	Price EUR	293.69	298.29	301.47	311.27	339.72	298.37	315.13	339.66	349.24	403.14	364.79	381.18	403.40	439.54	538.71	387	461	533	771		
705	Price EUR	309.93	314.82	318.29	328.52	362.86	316.33	334.68	361.36	373.24	436.05	388.50	406.19	430.41	470.87	586.42	339	454	537	898		
805	Price EUR	326.16	331.35	335.10	345.77	385.99	334.29	354.22	383.06	397.24	468.96	412.21	431.19	457.42	502.19	634.14	328	413	518	613	1026	
905	Price EUR	342.40	347.88	351.92	363.02	409.13	352.26	373.77	404.76	421.24	501.87	435.92	456.20	484.43	533.51	681.85	409	483	558	644		
1005	Price EUR	358.63	364.41	368.73	380.26	432.27	370.22	393.32	426.46	445.24	534.78	459.64	481.20	511.44	564.84	729.57	481.20	558	676	887	1281	
1105	Price EUR	374.87	380.93	385.54	397.51	455.40	388.18	412.86	448.16	469.24	567.68	483.35	506.20	538.45	596.16	777.28	450	531	613	885		
1205	Price EUR	391.10	397.46	402.36	414.76	478.54	406.14	432.41	469.86	493.24	600.59	507.06	531.21	565.46	627.48	824.99	490	579	669	965		
1305	Price EUR	407.34	413.99	419.17	432.00	501.67	424.11	451.96	491.56	517.24	633.50	530.77	556.21	592.47	658.81	872.71	531	627	724	1045		
1405	Price EUR	423.57	430.52	435.99	449.25	524.81	442.07	471.51	513.26	541.24	666.41	554.48	581.22	619.48	690.13	920.42	572	675	780	1125		
1605	Price EUR	456.04	463.57	469.61	483.74	571.08	478.00	510.60	556.66	589.23	732.22	601.90	631.22	673.50	752.77	1015.85	653	771	891	1285		
1805	Price EUR	488.51	496.63	503.24	518.24	617.35	513.92	549.69	600.06	637.23	798.04	649.32	681.23	727.52	815.42	1111.28	735	867	1002	1445		
2005	Price EUR	520.98	529.69	536.87	552.73	663.63	549.85	588.79	643.46	685.23	863.86	696.75	731.24	781.54	878.07	1206.71	816	964	1113	1605		
2305	Price EUR	533	683	827	970	1384	904	1149	1389	1628	2344	1212	1484	1756	2033	2937	984	1108	1279	1846		
2605	Price EUR	602	772	935	1096	1564	1022	1298	1570	1840	2648	1369	1676	1984	2297	3319	833	1060	1252	1446		
3005	Price EUR	695	890	1078	1264	1804	1178	1497	1811	2122	3055	1580	1934	2289	2651	3829	984	1002	1223	1444		
		444	568	688	807	1153	756	961	1161	1360	1954	1002	1223	1444	1668	2406	1051.64	1191.30	1683.85			





Verteo® Plan (PSN)

Prices incl. accessories/heat output

X = BL - 54 mm

Ordering example		Type 10	Type 20	Type 21	Type 22
Type 10, 2200 x 500 mm =					
Pr. cd. PSN10 220 0501X3K					
Type 20, 1800 x 500 mm =					
Pr. cd. PSN20 180 0501X3K					
Type 21, 1600 x 600 mm =					
Pr. cd. PSN21 160 0601X3K					
Type 22, 2000 x 400 mm =					
Pr. cd. PSN22 200 0401X3K					
		single row, Product code PSN10...	double row, Product code PSN20...	double row with convector, Product code PSN21...	double row with two convectors, Product code PSN22...
Height (BH) mm	1600 1800 2000 2200	1600 1800 2000 2200 2400	1600 1800 2000 2200 2400	1600 1800 2000 2200 2400	1600 1800 2000 2200 2400
Price per running m in EUR	447.88 459.35 499.59 522.75	557.56 620.18 702.06 771.90 861.04	712.91 726.16 817.68 883.92 970.61	810.45 851.40 898.36 954.96 1004.34	
Surcharge per unit in EUR	205.93 246.05 264.53 295.23	420.29 473.26 485.31 522.65 572.01	502.17 558.77 579.23 606.94 665.95	664.74 706.88 741.80 770.71 853.81	
Length (BL) mm	Heat output in watts/room temperature 20 °C				
300	Radiator exponent				
	watts	1.2879 1.2903 1.2922 1.2998 1.2926	1.3337 1.3302 1.3268 1.3283 1.3297	1.3204 1.3330 1.3457 1.3429 1.3402	
	75/65 °C	658 747 819 860 932	698 764 830 897 965	925 1018 1106 1191 1273	
	70/55 °C	529 600 658 690 748	557 610 663 716 770	739 812 880 948 1014	
	55/45 °C	338 383 420 439 478	350 384 418 451 485	467 511 552 595 637	
	Price	587.56 659.31 695.93 754.22 830.32	716.04 776.62 824.53 872.12 957.13	907.88 962.30 1011.31 1057.20 1155.11	
400	Radiator exponent				
	watts	1.2879 1.2903 1.2922 1.2998 1.2926	1.3262 1.3351 1.3379 1.3392 1.3333	1.3005 1.3122 1.3138 1.3150 1.3151	
	75/65 °C	868 986 1081 1135 1230	1018 1117 1209 1294 1392	1324 1453 1576 1691 1807	
	70/55 °C	698 792 868 910 988	813 891 963 1031 1110	1062 1163 1261 1353 1437	
	55/45 °C	446 506 554 580 631	513 560 606 648 699	676 737 799 857 899	
	Price	385.08 429.79 464.37 504.33	643.31 721.33 766.13 831.41 916.43	787.33 849.23 906.30 960.51 1054.19	988.92 1047.44 1101.14 1152.69 1255.55
500	Radiator exponent				
	watts	1.2879 1.2903 1.2922 1.2998 1.2926	1.3215 1.3400 1.3422 1.3356 1.3369	1.3020 1.3150 1.3192 1.3188 1.3630	
	75/65 °C	728 799 877 961	1078 1225 1343 1409 1528	1638 1798 1950 2092 2236	
	70/55 °C	590 644 703 773	866 984 1079 1130 1227	1002 1096 1186 1270 1365	1313 1438 1559 1673 1774
	55/45 °C	384 414 447 496	554 629 689 720 783	633 688 744 799 858	836 911 986 1058 1105
	Price	429.87 475.73 514.33 556.61	699.07 783.35 836.34 908.60 1002.53	858.63 921.85 988.07 1048.90 1151.26	1069.97 1132.58 1190.98 1248.19 1355.98
600	Radiator exponent				
	watts	1.2879 1.2903 1.2922 1.2998 1.2926	1.3168 1.3450 1.3465 1.3321 1.3404	1.3035 1.3179 1.3247 1.3226 1.3744	
	75/65 °C	873 958 1052 1153	1289 1464 1604 1684 1826	1487 1632 1766 1890 2033	1950 2140 2321 2490 2661
	70/55 °C	708 772 843 928	1036 1176 1288 1351 1466	1189 1299 1405 1508 1619	1563 1711 1854 1989 2107
	55/45 °C	461 497 536 595	662 751 823 860 936	753 814 881 949 1017	994 1083 1170 1257 1308
	Price	474.66 521.66 564.28 608.88	754.83 845.37 906.55 985.79 1088.63	929.92 994.47 1069.84 1137.29 1248.32	1151.01 1217.72 1280.82 1343.69 1456.41
700	Radiator exponent				
	watts	1.2879 1.2903 1.2922 1.2998 1.2926	1.3121 1.3499 1.3508 1.3286 1.3440	1.3050 1.3207 1.3301 1.3264 1.3857	
	75/65 °C	1019 1118 1227 1345	1499 1703 1866 1959 2124	1718 1885 2040 2186 2351	2259 2480 2689 2886 3084
	70/55 °C	826 901 983 1082	1205 1368 1499 1571 1706	1375 1499 1622 1745 1872	1810 1982 2146 2304 2438
	55/45 °C	538 580 625 694	770 874 957 1001 1089	872 938 1015 1100 1174	1151 1253 1352 1454 1507
	Price	519.45 567.60 614.24 661.16	810.58 907.39 976.75 1062.98 1174.74	1001.21 1067.08 1151.61 1225.68 1345.38	1232.06 1302.86 1370.65 1439.18 1556.85
800	Radiator exponent				
	watts	1.2879 1.2903 1.2922 1.2998 1.2926	1.3382 1.3452 1.3521 1.3498 1.3475	1.3702 1.3643 1.3583 1.3777 1.3971	
	75/65 °C	1709 1941 2128 2233 2422	1867 2043 2221 2399 2580	2528 2781 3023 3255 3478	
	70/55 °C	1373 1559 1709 1791 1945	1488 1626 1766 1908 2053	2004 2206 2401 2576 2744	
	55/45 °C	878 996 1091 1141 1242	935 1019 1104 1194 1286	1245 1374 1498 1597 1689	
	Price	866.34 969.40 1046.96 1140.17 1260.84	1072.50 1139.70 1233.37 1314.08 1442.44	1313.10 1388.00 1460.49 1534.68 1657.28	




Product code:

PSN 20 160 060 1 X3K

Colour Kermi white (RAL 9016)
Length
Height
Type

Special version intended specifically for areas with an increased risk of corrosion, see Kermi colour concept.



Verteo® Line (PLS)

Prices incl. accessories/heat output

X = BL - 54 mm

Ordering example		Type 10				Type 20				Type 21				Type 22										
Type 10, 2200 x 500 mm = PLS10 220 0501X3K																								
Type 20, 1800 x 500 mm = Pr. cd. PLS20 180 0501X3K																								
Type 21, 1600 x 600 mm = Pr. cd. PLS21 160 0601X3K																								
Type 22, 2000 x 400 mm = Pr. cd. PLS22 200 0401X3K																								
		single row, Product code PLS10...		double row, Product code PLS20...				double row with convector, Product code PLS21...				double row with two convectors, Product code PLS22...												
Height (BH) mm		1600	1800	2000	2200	1600	1800	2000	2200	2400	1600	1800	2000	2200	2400	1600	1800	2000						
Price per running m in EUR		470.28	482.31	524.57	548.89	585.43	651.19	737.18	810.50	904.09	748.56	762.47	858.56	928.11	1019.14	850.98	893.98	943.28	1002.71	1054.55				
Surcharge per unit in EUR		216.24	258.35	277.76	310.00	441.29	496.92	509.58	548.78	600.61	527.28	586.70	608.20	637.28	699.24	697.97	742.23	778.90	809.26	896.49				
Length (BL) mm		Heat output in watts/room temperature 20 °C																						
300	Radiator exponent					1.2879	1.2903	1.2922	1.2998	1.2926	1.3337	1.3302	1.3268	1.3283	1.3297	1.3204	1.3330	1.3457	1.3429	1.3402				
	watts	75/65 °C				658	747	819	860	932	698	764	830	897	965	925	1018	1106	1191	1273				
		70/55 °C				529	600	658	690	748	557	610	663	716	770	739	812	880	948	1014				
		55/45 °C				338	383	420	439	478	350	384	418	451	485	467	511	552	595	637				
	Price	EUR				616.92	692.28	730.73	791.93	871.84	751.85	815.44	865.77	915.71	1004.98	953.26	1010.42	1061.88	1110.07	1212.86				
400	Radiator exponent	1.2365	1.2707	1.3049	1.2798	1.2879	1.2903	1.2922	1.2998	1.2926	1.3262	1.3351	1.3379	1.3392	1.3333	1.3005	1.3122	1.3138	1.3150	1.3516				
	watts	75/65 °C	582	639	701	769	868	986	1081	1135	1230	1018	1117	1209	1294	1392	1324	1453	1576	1691	1807			
		70/55 °C	472	515	562	619	698	792	868	910	988	813	891	963	1031	1110	1062	1163	1261	1353	1437			
		55/45 °C	307	331	357	397	446	506	554	580	631	513	560	606	648	699	676	737	799	857	899			
	Price	EUR				404.35	451.27	487.59	529.56	675.46	757.40	804.45	872.98	962.25	826.70	891.69	951.62	1008.52	1106.90	1038.36	1099.82	1156.21	1210.34	1318.31
500	Radiator exponent	1.2365	1.2707	1.3049	1.2798	1.2879	1.2903	1.2922	1.2998	1.2926	1.3215	1.3400	1.3422	1.3356	1.3369	1.3020	1.3150	1.3192	1.3188	1.3630				
	watts	75/65 °C	728	799	877	961	1078	1225	1343	1409	1528	1254	1376	1489	1593	1713	1638	1798	1950	2092	2236			
		70/55 °C	590	644	703	773	866	984	1079	1130	1227	1002	1096	1186	1270	1365	1313	1438	1559	1673	1774			
		55/45 °C	384	414	447	496	554	629	689	720	783	633	688	744	799	858	836	911	986	1058	1105			
	Price	EUR				451.38	499.51	540.05	584.45	734.01	822.52	878.17	954.03	1052.66	901.56	967.94	1037.48	1101.34	1208.81	1123.46	1189.22	1250.54	1310.62	1423.77
600	Radiator exponent	1.2365	1.2707	1.3049	1.2798	1.2879	1.2903	1.2922	1.2998	1.2926	1.3168	1.3450	1.3465	1.3321	1.3404	1,1.3035	1.3179	1.3247	1.3226	1.3744				
	watts	75/65 °C	873	958	1052	1153	1289	1464	1604	1684	1826	1487	1632	1766	1890	2033	1950	2140	2321	2490	2661			
		70/55 °C	708	772	843	928	1036	1176	1288	1351	1466	1189	1299	1405	1508	1619	1563	1711	1854	1989	2107			
		55/45 °C	461	497	536	595	662	751	823	860	936	753	814	881	949	1017	994	1083	1170	1257	1308			
	Price	EUR				498.41	547.74	592.50	639.33	792.55	887.63	951.89	1035.08	1143.06	976.42	1044.18	1123.34	1194.15	1310.72	1208.56	1278.62	1344.87	1410.89	1529.22
700	Radiator exponent	1.2365	1.2707	1.3049	1.2798	1.2879	1.2903	1.2922	1.2998	1.2926	1.3121	1.3499	1.3508	1.3286	1.3440	1.3050	1.3207	1.3301	1.3264	1.3857				
	watts	75/65 °C	1019	1118	1227	1345	1499	1703	1866	1959	2124	1718	1885	2040	2186	2351	2259	2480	2689	2886	3084			
		70/55 °C	826	901	983	1082	1205	1368	1499	1571	1706	1375	1499	1622	1745	1872	1810	1982	2146	2304	2438			
		55/45 °C	538	580	625	694	770	874	957	1001	1089	872	938	1015	1100	1174	1151	1253	1352	1454	1507			
	Price	EUR				545.44	595.97	644.96	694.22	851.09	952.75	1025.61	1116.13	1233.47	1051.27	1120.43	1209.19	1286.96	1412.64	1293.66	1368.02	1439.20	1511.16	1634.68
800	Radiator exponent					1.2879	1.2903	1.2922	1.2998	1.2926	1.3382	1.3452	1.3521	1.3498	1.3475	1.3702	1.3643	1.3583	1.3777	1.3971				
	watts	75/65 °C				1709	1941	2128	2233	2422	1867	2043	2221	2399	2580	2528	2781	3023	3255	3478				
		70/55 °C				1373	1559	1709	1791	1945	1488	1626	1766	1908	2053	2004	2206	2401	2576	2744				
		55/45 °C				878	996	1091	1141	1242	935	1019	1104	1194	1286	1245	1374	1498	1597	1689				
	Price	EUR				909.63	1017.87	1099.32	1197.18	1323.88	1126.13	1196.68	1295.05	1379.77	1514.55	1378.75	1457.41	1533.52	1611.43	1740.13				

15



Product code:

PLS 20 160 060 1 X3K

Colour Kermi white (RAL 9016)

Length

Height

Type





Verteo steel panel radiators

Special version intended specifically for areas with an increased risk of corrosion, see Kermi colour concept.


Accessories for Verteo® steel panel radiators

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version	
						FSN	PSN/PLS
Wall bracket set (short) for Verteo steel panel radiators							
	Set comprising: 4 (Type 10: 2) wall brackets short, 6 (Type 10: 4) screws, 6 (Type 10: 4) washers, 6 (Type 10: 4) wall anchors, 2 spacers, 4 (Type 10: 2) sound insulation clips for wall bracket, 2 dehinging safety devices, 1 air vent plug, 1 blanking plug.						
Suitable for requirement classes I, II and III*. * Requirement class III is fulfilled by the additional use of shift restraints ZK00200001 and ZK00820001.	White For type 20, 21, 22, distance to wall 30 mm For type 10, distance to wall 60 mm	ZB0268 0001 ZB0268 0002	1 1	pc pc	18.56/pc 18.56/pc	● ●	● ●
Wall bracket set (long) for Verteo steel panel radiators							
	Set comprising: 2 wall brackets, 2 safety clips for wall bracket, 3 sound insulation clips. Note: For Verteo type 10 with a connection from the top, we recommend fixing the radiator using a wall bracket set (long).						
Suitable for requirement classes I, II and III*. * Requirement class III is fulfilled by the additional use of shift restraints ZK00200001 and ZK00820001.	White Height 1600 mm Height 1800 mm Height 2000 mm Height 2200 mm Height 2400 mm	ZB0261 0001 ZB0261 0002 ZB0261 0003 ZB0261 0004 ZB0261 0005	1 1 1 1 1	pc pc pc pc pc	25.81/pc 25.81/pc 25.81/pc 25.81/pc 25.81/pc	● ● ● ● ●	● ● ● ● ●
Shift restraints for wall bracket							
	For wall bracket ZB0264..., ZB0265..., ZB0259..., ZB0260..., ZB0261..., ZB0268... Set comprising 2 pieces.						
Suitable for requirement classes I, II, and III.		ZK0020 0001	2	pc	6.60/pc	● ●	● ●
Shift restraint for lug							
	For installation on the lug. Also required if height > 1.5 x length. To secure the lower section of the radiator against shifting. One set per radiator required. Set comprising 2 pieces.						
Suitable for requirement class III.		ZK0082 0001	2	pc	2.79/pc	● ●	● ●

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version	
						FSN	PSN / PLs
Support bracket set							
	<p>Set comprising: 2 support brackets on left + on right, 2 dehinging safety devices and shift restraints.</p> <p>Matching plastic covers for: Installation on unfinished floors, Product code ZB01190001, Installation on finished floors, Product code ZB00290001.</p> <p>Note: Only the version in RAL 9016 is suitable for the Verteo Profile. Depending on the type of connection, only of limited use. For detailed information, see steel panel radiators technology.</p>						
Suitable for requirement classes I, II and III. If wall does not have sufficient load-bearing capacity, prevent tipping by using short wall bracket (included in radiator scope of delivery) in combination with shift restraint (included in support bracket scope of delivery).							
Type 20/21							
Visible parts white	ZB0290 0001	1	pc	90.60 / pc	●	●	
* Please state colour when ordering:							
Visible parts colour	ZB0290*	1	pc	113.25 / pc	●	●	
Type 22							
Visible parts white	ZB0291 0001	1	pc	90.60 / pc	●	●	
* Please state colour when ordering:							
Visible parts colour	ZB0291*	1	pc	113.25 / pc	●	●	
Plastic rosette							
	For stand pipe 30 x 10 mm (when installing on an unfinished floor).						
White	ZB0119 0001	1	pc	4.43 / pc	●	●	
* Please state colour when ordering:							
Colour	ZB0119*	1	pc	5.54 / pc	●	●	
Cover							
	For bracket base (pipe 30 x 10 mm) (when installing on finished floor).						
White	ZB0029 0001	1	pc	8.99 / pc	●	●	
* Please state colour when ordering:							
Colour	ZB0029*	1	pc	11.24 / pc	●	●	

Accessories for Verteo® steel panel radiators

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version	
						FSN	PSN/PLS
Towel rail for vertical steel panel radiators							
	<p>Ininitely adjustable height Depth: 55 mm Pipe diameter: 18 mm</p> <p>Suitable for length 800 mm, may be cut for shorter lengths. Not suitable for type 10!</p>						
	Surface support + towel rail white	ZC0070 0001	1	pc	45.69/pc	●	●
	Surface support graphite grey + towel rail silver anodised	ZC0070 0002	1	pc	58.52/pc	●	●
Side panel for type 20/21							
	4 x retaining bars included.						
	White						
	Height 1600 mm	ZA0155 0001	1	pc	24.14/pc	●	●
	Height 1800 mm	ZA0155 0002	1	pc	24.14/pc	●	●
	Height 2000 mm	ZA0155 0003	1	pc	24.14/pc	●	●
	Height 2200 mm	ZA0155 0004	1	pc	24.14/pc	●	●
	Height 2400 mm	ZA0155 0005	1	pc	24.14/pc	●	●
	* Please state colour and height when ordering:						
	Colour	ZA0155*	1	pc	30.18/pc	●	●
Side panel for type 22							
	4 x retaining bars included.						
	White						
	Height 1600 mm	ZA0156 0001	1	pc	29.95/pc	●	●
	Height 1800 mm	ZA0156 0002	1	pc	29.95/pc	●	●
	Height 2000 mm	ZA0156 0003	1	pc	29.95/pc	●	●
	Height 2200 mm	ZA0156 0004	1	pc	29.95/pc	●	●
	Height 2400 mm	ZA0156 0005	1	pc	29.95/pc	●	●
	* Please state colour and height when ordering:						
	Colour	ZA0156*	1	pc	37.44/pc	●	●

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version	
						FSN	PSN / PLS
Top cover type 20/21							
							
White							
Length 300 mm	ZA0152 0001	1	pc	22.84 / pc	●	●	
Length 400 mm	ZA0152 0002	1	pc	24.53 / pc	●	●	
Length 500 mm	ZA0152 0003	1	pc	26.20 / pc	●	●	
Length 600 mm	ZA0152 0004	1	pc	27.88 / pc	●	●	
Length 700 mm	ZA0152 0005	1	pc	29.53 / pc	●	●	
Length 800 mm	ZA0152 0006	1	pc	31.21 / pc	●	●	
Top cover type 22							
							
White							
Length 300 mm	ZA0153 0001	1	pc	28.41 / pc	●	●	
Length 400 mm	ZA0153 0002	1	pc	30.09 / pc	●	●	
Length 500 mm	ZA0153 0003	1	pc	31.75 / pc	●	●	
Length 600 mm	ZA0153 0004	1	pc	33.44 / pc	●	●	
Length 700 mm	ZA0153 0005	1	pc	35.11 / pc	●	●	
Length 800 mm	ZA0153 0006	1	pc	36.79 / pc	●	●	

Accessories for Verteo® steel panel radiators

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version																						
						FSN	PSN/PLS																					
Valve shut-off block set, angled																												
	 <p>For connection to radiators with G 1/2" (internal thread), incl. reducing pipe nipple 1/2" x 3/4". Connections to the pipe system 3/4" euro taper (external thread). Connection for thermostatic sensor head M30 x 1.5. Valve adjustable (delivery status: for two-pipe system, valve with highest presetting, incl. site protection). Also suitable for one-pipe operation by adjusting the bypass spindle! The integrated thermostatic valve is suitable for flow from both sides (irrespective of the flow path).</p> <p>Set comprising: 1 fitting with 50 mm hub distance between radiator and pipe system with integrated valve, 1 decorative cover, 2 reducing pipe nipples.</p> <p>Note: Pay attention to the flow direction in the radiator.</p> <table> <tbody> <tr> <td>Cover white</td> <td>ZV0041 0001</td> <td>1</td> <td>pc</td> <td>67.52 / pc</td> <td>●</td> <td>●</td> </tr> <tr> <td>Cover chrome</td> <td>ZV0041 0002</td> <td>1</td> <td>pc</td> <td>101.92 / pc</td> <td>●</td> <td>●</td> </tr> <tr> <td>Cover with stainless steel appearance</td> <td>ZV0041 0003</td> <td>1</td> <td>pc</td> <td>112.35 / pc</td> <td>●</td> <td>●</td> </tr> </tbody> </table>	Cover white	ZV0041 0001	1	pc	67.52 / pc	●	●	Cover chrome	ZV0041 0002	1	pc	101.92 / pc	●	●	Cover with stainless steel appearance	ZV0041 0003	1	pc	112.35 / pc	●	●						
Cover white	ZV0041 0001	1	pc	67.52 / pc	●	●																						
Cover chrome	ZV0041 0002	1	pc	101.92 / pc	●	●																						
Cover with stainless steel appearance	ZV0041 0003	1	pc	112.35 / pc	●	●																						
Valve shut-off block, straight design																												
	 <p>For connection to radiators with G 1/2" (internal thread), incl. reducing pipe nipple 1/2" x 3/4". Connections to the pipe system 3/4" euro taper (external thread). Connection for thermostatic sensor head M30 x 1.5. Valve adjustable (delivery status: for two-pipe system, valve with highest presetting, incl. site protection). Also suitable for one-pipe operation by adjusting the bypass spindle! The integrated thermostatic valve is suitable for flow from both sides (irrespective of the flow path).</p> <p>Set comprising: 1 fitting with 50 mm hub distance between radiator and pipe system with integrated valve, 1 decorative cover, 2 reducing pipe nipples.</p> <p>Note: Pay attention to the flow direction in the radiator.</p> <table> <tbody> <tr> <td>Cover white</td> <td>ZV0040 0001</td> <td>1</td> <td>pc</td> <td>67.52 / pc</td> <td>●</td> <td>●</td> </tr> <tr> <td>Cover chrome</td> <td>ZV0040 0002</td> <td>1</td> <td>pc</td> <td>101.92 / pc</td> <td>●</td> <td>●</td> </tr> <tr> <td>Cover with stainless steel appearance</td> <td>ZV0040 0003</td> <td>1</td> <td>pc</td> <td>112.35 / pc</td> <td>●</td> <td>●</td> </tr> </tbody> </table>	Cover white	ZV0040 0001	1	pc	67.52 / pc	●	●	Cover chrome	ZV0040 0002	1	pc	101.92 / pc	●	●	Cover with stainless steel appearance	ZV0040 0003	1	pc	112.35 / pc	●	●						
Cover white	ZV0040 0001	1	pc	67.52 / pc	●	●																						
Cover chrome	ZV0040 0002	1	pc	101.92 / pc	●	●																						
Cover with stainless steel appearance	ZV0040 0003	1	pc	112.35 / pc	●	●																						

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version	
						FSN	PSN / PLS
Thermostatic sensor head							
	White	ZV0038 0003	1	pc	22.94 / pc	●	●
	Chrome	ZV0038 0001	1	pc	27.12 / pc	●	●
	Stainless steel appearance	ZV0038 0002	1	pc	34.98 / pc	●	●
Angle valve							
	Angle valve for connection on left DN 15 1/2" (thermostatic sensor head on right), M30 x 1.5	ZV0030 0003	1	pc	139.14 / pc	●	●
	Angle valve for connection on right DN 15 1/2" (thermostatic sensor head on left), M30 x 1.5	ZV0030 0004	1	pc	139.14 / pc	●	●
Angled return fitting							
	Surface chrome-plated. DN 15 1/2"	ZV0018 0002	1	pc	108.51 / pc	●	●

Steel panel radiator accessories – Radiation shield

Kermi radiation shield to prevent heat loss through glazed surfaces. With the radiation shield from Kermi, up to 80 % of heat loss can be prevented.

Scope of delivery: Radiation shield with flat front and standard fixing elements.

Depth: 15 mm

Colour: Kermi white (colour finish on request).

The radiation shield is installed using the fixing elements provided.

When installing on an external soil stand bracket, the **ZK00120001 fixing set** is absolutely essential.

Product code:

PWS00 **XX** **XX**

Length Height

Ordering example:

Radiation shield for radiator with height

400 mm and length 800 mm: **PWS000408**

554 mm and length 900 mm: **PWS00D509**

Description Figure	Height	Radiator radiation shield										Radiator version				
		200	300	400	500	554	600	750	900	954	FK0/FH0	FTV	FTP	PK0/PK	PH0/PK	PTV/PLV
	Price per running m in EUR	134.59	141.67	147.98	164.46	169.25	173.28	191.62	209.97	216.56						
	Surcharge per unit in EUR	105.76	111.32	120.17	126.50	130.60	134.09	137.90	141.67	143.02						
	Product code	Length														
PWS00...	400 mm		167.99	179.36	192.28	198.30	203.40	214.55	225.66	229.64	● ● ● ● ● ● ● ●					
PWS00...	500 mm		182.16	194.16	208.73	215.23	220.73	233.71	246.66	251.30	● ● ● ● ● ● ● ●					
PWS00...	600 mm	186.51	196.32	208.96	225.18	232.15	238.06	252.87	267.65	272.96	● ● ● ● ● ● ● ●					
PWS00...	700 mm	199.97	210.49	223.76	241.62	249.08	255.39	272.03	288.65	294.61	● ● ● ● ● ● ● ●					
PWS00...	800 mm	213.43	224.66	238.55	258.07	266.00	272.71	291.20	309.65	316.27	● ● ● ● ● ● ● ●					
PWS00...	900 mm	226.89	238.82	253.35	274.51	282.93	290.04	310.36	330.64	337.92	● ● ● ● ● ● ● ●					
PWS00...	1000 mm	240.35	252.99	268.15	290.96	299.85	307.37	329.52	351.64	359.58	● ● ● ● ● ● ● ●					
PWS00...	1100 mm	253.81	267.16	282.95	307.41	316.78	324.70	348.68	372.64	381.24	● ● ● ● ● ● ● ●					
PWS00...	1200 mm	267.27	281.32	297.75	323.85	333.70	342.03	367.84	393.63	402.89	● ● ● ● ● ● ● ●					
PWS00...	1300 mm	280.73	295.49	312.54	340.30	350.63	359.35	387.01	414.63	424.55	● ● ● ● ● ● ● ●					
PWS00...	1400 mm	294.19	309.66	327.34	356.74	367.55	376.68	406.17	435.63	446.20	● ● ● ● ● ● ● ●					
PWS00...	1600 mm	321.10	337.99	356.94	389.64	401.40	411.34	444.49	477.62	489.52	● ● ● ● ● ● ● ●					
PWS00...	1800 mm	348.02	366.33	386.53	422.53	435.25	445.99	482.82			● ● ● ● ● ● ● ●					
PWS00...	2000 mm	374.94	394.66	416.13	455.42	469.10	480.65	521.14			● ● ● ● ● ● ● ●					
PWS00...	2300 mm	415.32	437.16	460.52	504.76	519.88	532.63	578.63			● ● ● ● ● ● ● ●					
PWS00...	2600 mm	455.69	479.66	504.92	554.10	570.65	584.62	636.11			● ● ● ● ● ● ● ●					
PWS00...	3000 mm	509.53	536.33	564.11	619.88	638.35	653.93	712.76			● ● ● ● ● ● ● ●					



Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version
Plastic corners	Set comprising 2 pieces.	ZK0011 0001	2	pc	5.22 /pc	FKO FH0 FTV FTP PKO/PLK PHO/PLK PTV/PLV PTP/PLP
Fixing set	Absolutely essential for installation of the radiation shield on an external soil stand bracket. Set comprising: 4 brackets, 2 clips, 2 bolts, 8 expanding rivets.	ZK0012 0001	1	pc	18.97 /pc	
Fixing set for external soil stand bracket, requirement class III	In addition to ZK00120001 for installation of the radiation shield on an external soil stand bracket with support set for requirement class III. One set per bracket. Set comprising: 2 slide pieces with screw.	ZK0012 0002	1	pc	27.88 /pc (= 2 slide pieces)	

Adapter D for steel panel radiators with integrated valve

Kermi adapter D, the flexible solution for renovations. For trouble-free replacement of old radiators with Kermi Profile radiators with integrated valve, Plan/Line radiators with integrated valve and Plan / Line Hygiene radiators with integrated valve.

- The adjustable connection for easy conversion to advanced technology and a modern appearance, overnight
- Quick, rational, clean, without expensive renovation work and without changing the existing pipe connections

- For replacing old radiators with hub distances 300, 350, 500, 600, 900, 1000 mm; moreover, all other hub distances can be provided with Adapter-D.
- Using the flexibility of Adapter-D and the fixing accessories, it is easy to install the radiator on the existing connections



Easy adaptation through variable height adjustment.



From an old radiator ...

... to a modern, energy-saving radiator.



Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version						
						FK0	FH0	FTV	FTP	PK0/PK	PH0/PK	PTV/PLV
Adapter-D set	For replacement of old radiators with new Kermi radiators with integrated valve. Set comprising: 1 adapter, 1 sealing cap, 1 clamp ring screw connection.	ZT0065 0001	1	pc	28.11/pc	●	●	●	●	●	●	●

Adapter-KD for compact steel panel radiators

The perfectly fitting solution for fast, easy-to-install, and clean radiator modernisation. Kermi Adapter-KD specifically for renovation. For trouble-free replacement of old radiators with Kermi Profile and Plan / Line compact radiators and Hygiene steel panel radiators. The optimal connection for easy conversion to advanced technology and a modern appearance. Overnight. No complex reconstruction work. No need to change the existing pipe connections.

Clean, fast, efficient.

The intelligent connection for easy renovation

- The Adapter-KD makes an adjustment for hub distance differences, thus making installation with the existing connections easy



Hub distance (NA)		Can be replaced with Kermi compact radiator + Adapter-KD
Cast-iron radiator according to DIN	Steel radiator according to DIN	
200	200	Height 300
300	300	Height 300/400
500	500	Height 500/600
600	600	Height 600
900	900	Height 900

The Kermi Adapter-KD for compact radiators assures trouble-free adaptation to the existing pipe system by compensating hub distance differences.

Description Figure	Description	Product code	Delivery quantity unit	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version
Adapter-KD for compact radiators						
	 Set comprising 2 pieces.	ZT0169 0001	2	pc	14.85 / pc	FK0 FH0 FTV FTP PK0/PK PH0/PLK PTV/PLV PTP/PLP
	For valve size/connection DN 15 (1/2")	ZT0169 0002	2	pc	17.69 / pc	● ● ● ●


Steel panel radiator accessories – Wall fixing

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FTP	PRO/PK	PHO/PK
Built-into-wall bracket set											
	Set comprising: 2 built-into-wall brackets, 2 safety clips, 2 spacers.										
Suitable for requirement classes I and II.	Length 95 mm	ZB0276 0001	1	pc	4.19 /pc	●	●	●	●	●	●
	Length 130 mm	ZB0276 0002	1	pc	4.19 /pc	●	●	●	●	●	●
	Length 160 mm	ZB0276 0003	1	pc	4.19 /pc	●	●	●	●	●	●
	Length 200 mm	ZB0276 0004	1	pc	4.19 /pc	●	●	●	●	●	●
Built-into-wall brackets as 3rd bracket from length 1800 mm (set)											
	Set comprising: 1 built-into-wall bracket, 1 safety clip, 1 spacer.										
Suitable for requirement classes I and II.	Length 95 mm	ZB0277 0001	1	pc	3.30 /pc	●	●	●	●	●	●
	Length 130 mm	ZB0277 0002	1	pc	3.30 /pc	●	●	●	●	●	●
	Length 160 mm	ZB0277 0003	1	pc	3.30 /pc	●	●	●	●	●	●
	Length 200 mm	ZB0277 0004	1	pc	3.30 /pc	●	●	●	●	●	●
Built-into-wall bracket loose											
	Set comprising 10 pcs.										
Suitable for requirement classes I and II. Compliant only in conjunction with safety clip ZB02790001.	Length 95 mm	ZB0278 0001	10	pc	2.12 /pc	●	●	●	●	●	●
	Length 130 mm	ZB0278 0002	10	pc	2.12 /pc	●	●	●	●	●	●
	Length 160 mm	ZB0278 0003	10	pc	2.12 /pc	●	●	●	●	●	●
	Length 200 mm	ZB0278 0004	10	pc	2.12 /pc	●	●	●	●	●	●
Spacer complete											
	Suspension point 18-28 mm										
	Distance to wall 25-35 mm, white	ZB0285 0001	1	pc	0.75 /pc	●	●	●	●	●	●
	Distance to wall 25-35 mm, grey	ZB0285 0002	1	pc	1.04 /pc	●	●	●	●	●	●
	Suspension point 27-43 mm										
	Distance to wall 34-50 mm, white	ZB0047 0001	1	pc	0.75 /pc	●	●	●	●	●	●
	Distance to wall 34-50 mm, white	ZB0114 0001	10	pc	0.39 /pc	●	●	●	●	●	●
	Distance to wall 34-50 mm, grey	ZB0286 0001	1	pc	1.04 /pc	●	●	●	●	●	●

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version							
						FKO	FHO	FTV	FIP	PKO/PLK	PHO/PLK	PTV/PLV	PTP/PLP
Safety clips for built-in-wall brackets	Set comprising 10 pcs.												
													
	For built-in-wall bracket Ø 18 mm	ZB0279 0001	10	pc	0.23 /pc	● ● ● ● ● ● ● ● ● ●							
Extension spacer	Extension in steps of 10 mm.												
		ZB0048 0001	1	pc	0.62 /pc	● ● ● ● ● ● ● ● ● ●							
		ZB0115 0001	10	pc	0.27 /pc	● ● ● ● ● ● ● ● ● ●							
Spacer extension 35 mm	For spacer, complete ZB01140001. Set comprising 2 pieces.												
		ZB0294 0001	2	pc	2.79 /pc	● ● ● ● ● ● ● ● ● ●							
Cover for built-in-wall bracket	Set comprising: 10 covers for built-in-wall bracket, 10 rosettes for cover of built-in-wall bracket.												
		ZB0126 0001	1	pc	10.70 /pc	● ● ● ● ● ● ● ● ● ●							
	Visible parts white												

Steel panel radiator accessories – Wall fixing

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version						
						FKO	FHO	FTV	FTP	PRO/PK	PHO/PK	PTV/PV
Prefabricated house fixing system for steel panel radiators type 11-33	 <p>Set of 2 comprising: 2 prefabricated house fixing systems, 2 screws ø 7 x 120, 2 anchors ø 10 x 80, 2 dehinging safety devices, 2 spacers.</p> <p>Suitable for requirement classes I and II. For type 33 from height 750 mm and length 1300 mm, brackets need to be installed on the top and bottom lug.</p>											
	Set of 2, distance to wall 30 mm	ZB0392 0002	1	pc	10.59/pc	●	●	●	●	●	●	●
Prefabricated house fixing system for steel panel radiators type 11-33 as 3rd bracket from length 1800 mm	 <p>Set of 1 comprising: 1 prefabricated house fixing system, 1 screw ø 7 x 120, 1 anchor ø 10 x 80, 1 x dehinging safety device, 1 spacer.</p> <p>Suitable for requirement classes I and II. For type 33 from height 750 mm and length 1300 mm, brackets need to be installed on the top and bottom lug.</p>											
	Set of 1, distance to wall 30 mm	ZB0392 0001	1	pc	5.45/pc	●	●	●	●	●	●	●
Prefabricate house fixing system for steel panel radiators type 10	 <p>Set of 2 comprising: 4 prefabricated house fixing systems, 4 extensions, 4 screws ø 7 x 140, 4 anchors ø 10 x 60, 2 dehinging safety devices.</p> <p>Suitable for requirement classes I and II.</p>											
	Set of 2, distance to wall 60 mm	ZB0393 0002	1	pc	10.59/pc	●	●	●	●	●	●	●
Prefabricated house fixing system for steel panel radiators type 10 as 3rd bracket from length 1800 mm	 <p>Set of 1 comprising: 2 prefabricated house fixing systems, 2 extensions, 2 screws ø 7 x 140, 2 anchors ø 10 x 60, 1 x dehinging safety device.</p> <p>Suitable for requirement classes I and II.</p>											
	Set of 1, distance to wall 60 mm	ZB0393 0001	1	pc	5.45/pc	●	●	●	●	●	●	●

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FIP	PKO/PLK	PHO/PLK
Wall bracket set (short) for steel panel radiators											
	For universal use. Set comprising: 2 wall brackets short, 4 screws, 4 washers, 4 wall anchors, 2 sound insulation clips, 2 dehinging safety devices for wall bracket, 2 spacers.										
Suitable for requirement classes I, II, and III. Requirement class III is fulfilled by the use of shift restraints ZKO0200001 and ZKO0820001. For Type 10, possible only with distance to wall of 50 or 60 mm. For Type 11-33, possible only with distance to wall of 30 or 40 mm.	White Distance to wall 30 mm ZB0264 0001 1 pc 7.80 /pc Distance to wall 40 mm ZB0264 0002 1 pc 7.80 /pc Distance to wall 50 mm ZB0264 0003 1 pc 7.80 /pc Distance to wall 60 mm ZB0264 0004 1 pc 7.80 /pc Galvanised Distance to wall 30 mm ZB0264 0005 1 pc 6.31 /pc Distance to wall 40 mm ZB0264 0006 1 pc 6.31 /pc Distance to wall 50 mm ZB0264 0007 1 pc 6.31 /pc Distance to wall 60 mm ZB0264 0008 1 pc 6.31 /pc	ZB0264*	1	pc	9.75 /pc						
* Please state colour and distance to wall when ordering:											
Wall bracket (short) as 3rd bracket from length 1800 mm (set)											
	For universal use. Set comprising: 1 wall bracket (short), 2 screws, 2 washers, 2 wall anchors, 1 sound insulation clip, 1 dehinging safety device for wall brackets, 1 spacer.										
Suitable for requirement classes I, II, and III. Requirement class III is fulfilled by the use of shift restraints ZKO0200001 and ZKO0820001. For Type 10, possible only with distance to wall of 50 or 60 mm. For Type 11-33, possible only with distance to wall of 30 or 40 mm.	White Distance to wall 30 mm ZB0265 0001 1 pc 5.01 /pc Distance to wall 40 mm ZB0265 0002 1 pc 5.01 /pc Distance to wall 50 mm ZB0265 0003 1 pc 5.01 /pc Distance to wall 60 mm ZB0265 0004 1 pc 5.01 /pc Galvanised Distance to wall 30 mm ZB0265 0005 1 pc 3.91 /pc Distance to wall 40 mm ZB0265 0006 1 pc 3.91 /pc Distance to wall 50 mm ZB0265 0007 1 pc 3.91 /pc Distance to wall 60 mm ZB0265 0008 1 pc 3.91 /pc	ZB0265*	1	pc	6.26 /pc						
* Please state colour and distance to wall when ordering:											


Steel panel radiator accessories – Wall fixing

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version						
						FKO	FHO	FTV	FTP	PRO/PK	PHO/PK	PTV/PLV
Wall bracket set variable with depth adjustment												
	Set comprising: 1 wall bracket variable, 2 screws, 2 washers, 2 wall anchors, 2 sound insulation clips, 1 dehinging safety device for wall bracket.											
Suitable for requirement classes I, II, and III. Requirement class III is fulfilled by the use of shift restraints ZK00200002 and ZK00820001. For Type 10, possible only with distance to wall of 45 to 60 mm. For Type 11-33, possible only with distance to wall of 35 to 45 mm.	Visible parts white											
	Distance to wall 35 - 45 mm	ZB0287 0001	1	pc	11.35 / pc	●	●	●	●	●	●	●
	Distance to wall 45 - 60 mm	ZB0287 0002	1	pc	11.35 / pc	●	●	●	●	●	●	●
	Distance to wall 60 - 100 mm	ZB0287 0003	1	pc	11.35 / pc	●	●	●	●	●	●	●
	* Please state colour and distance to wall when ordering:											
	Visible parts colour	ZB0287*	1	pc	14.19 / pc	●	●	●	●	●	●	●
Wall bracket set (long)												
	Galvanised steel sheet, angled, for universal use (prefabricated houses, wooden and concrete walls, etc.); due to varying length of limbs two different wall spacings are possible (30 mm, 50 mm), height-adjustable.											
Suitable for requirement classes I and II. Compliant only in conjunction with screw set with wall anchor ZK0071 0001.	Set comprising: 2 wall brackets, 2 dehinging safety devices for wall bracket, 3 sound insulation clips.											
	White											
	Height 300 mm	ZB0259 0001	1	pc	8.43 / pc	●	●	●	●	●	●	●
	Height 400 mm	ZB0259 0002	1	pc	8.43 / pc	●	●	●	●	●	●	●
	Height 500 mm	ZB0259 0003	1	pc	8.43 / pc	●	●	●	●	●	●	●
	Height 554 mm	ZB0259 0004	1	pc	8.43 / pc	●						
	Height 600 mm	ZB0259 0005	1	pc	8.43 / pc	●	●	●	●	●	●	●
	Height 750 mm	ZB0259 0006	1	pc	8.43 / pc	●	●	●	●			
	Height 900 mm	ZB0259 0007	1	pc	8.43 / pc	●	●	●	●	●	●	●
	Height 954 mm	ZB0259 0008	1	pc	8.43 / pc	●						
	Galvanised											
	Height 300 mm	ZB0259 0009	1	pc	6.47 / pc	●	●	●	●	●	●	●
	Height 400 mm	ZB0259 0010	1	pc	6.47 / pc	●	●	●	●	●	●	●
	Height 500 mm	ZB0259 0011	1	pc	6.47 / pc	●	●	●	●	●	●	●
	Height 554 mm	ZB0259 0012	1	pc	6.47 / pc	●						
	Height 600 mm	ZB0259 0013	1	pc	6.47 / pc	●	●	●	●	●	●	●
	Height 750 mm	ZB0259 0014	1	pc	6.47 / pc	●	●	●	●			
	Height 900 mm	ZB0259 0015	1	pc	6.47 / pc	●	●	●	●	●	●	●
	Height 954 mm	ZB0259 0016	1	pc	6.47 / pc	●						

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version						
						FKO	FHO	FTV	FIP	PKO/PLK	PHO/PLK	PTV/PLV
Wall bracket (long) as 3rd bracket from length 1800 mm												
	When ordered individually, it is necessary to order sound insulation clips ZB02690001 separately.											
White												
Height 300 mm	ZB0260 0001	1	pc	3.78 /pc	● ● ● ● ● ● ● ● ●							
Height 400 mm	ZB0260 0002	1	pc	3.78 /pc	● ● ● ● ● ● ● ● ●							
Height 500 mm	ZB0260 0003	1	pc	3.78 /pc	● ● ● ● ● ● ● ● ●							
Height 554 mm	ZB0260 0004	1	pc	3.78 /pc	● ● ● ● ● ● ● ● ●							
Height 600 mm	ZB0260 0005	1	pc	3.78 /pc	● ● ● ● ● ● ● ● ●							
Height 750 mm	ZB0260 0006	1	pc	3.78 /pc	● ● ● ● ● ● ● ● ●							
Height 900 mm	ZB0260 0007	1	pc	3.78 /pc	● ● ● ● ● ● ● ● ●							
Height 954 mm	ZB0260 0008	1	pc	3.78 /pc	● ● ● ● ● ● ● ● ●							
Galvanised												
Height 300 mm	ZB0260 0009	1	pc	2.81 /pc	● ● ● ● ● ● ● ● ●							
Height 400 mm	ZB0260 0010	1	pc	2.81 /pc	● ● ● ● ● ● ● ● ●							
Height 500 mm	ZB0260 0011	1	pc	2.81 /pc	● ● ● ● ● ● ● ● ●							
Height 554 mm	ZB0260 0012	1	pc	2.81 /pc	● ● ● ● ● ● ● ● ●							
Height 600 mm	ZB0260 0013	1	pc	2.81 /pc	● ● ● ● ● ● ● ● ●							
Height 750 mm	ZB0260 0014	1	pc	2.81 /pc	● ● ● ● ● ● ● ● ●							
Height 900 mm	ZB0260 0015	1	pc	2.81 /pc	● ● ● ● ● ● ● ● ●							
Height 954 mm	ZB0260 0016	1	pc	2.81 /pc	● ● ● ● ● ● ● ● ●							
Sound insulation clip												
	For wall brackets ZB0259..., ZB0260..., ZB0264..., ZB0265...											
Set comprising 6 pcs.												
White	ZB0269 0001	6	pc	0.47 /pc	● ● ● ● ● ●							
Grey	ZB0269 0002	6	pc	0.64 /pc	● ● ● ● ● ●							

Steel panel radiator accessories – Wall fixing

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version							
						FKO	FHO	FTV	FTP	PRO/PK	PHO/PK	PTV/PV	PIP/PVP
Dehinging safety device													
													
	For wall brackets ZB0259..., ZB0260..., ZB0264..., ZB0265...												
	Set comprising 4 pcs.												
	White	ZK0070 0001	4	pc	0.35 /pc	● ● ● ● ● ● ● ●							
	Grey	ZK0070 0002	4	pc	0.46 /pc	● ● ● ● ● ● ● ●							
Shift restraints for wall bracket													
													
	For wall bracket ZB0264..., ZB0265..., ZB0259..., ZB0260..., ZB0261..., ZB0268...												
	For requirement class III, only with ZB0264..., ZB0265..., ZB0261..., ZB0268....												
	Set comprising 2 pieces.												
		ZK0020 0001	2	pc	6.60 /pc	● ● ● ● ● ● ● ●							
Shift restraint for wall bracket variable													
													
	For wall bracket ZB0287...												
	Set comprising 2 pieces.												
		ZK0020 0002	2	pc	6.60 /pc	● ● ● ● ● ● ● ●							
Shift restraint for lug													
													
	For installation on the lug. Also required if height > 1.5 x length. To secure the lower section of the radiator against shifting. One set per radiator required.												
	Set comprising 2 pieces.												
		ZK0082 0001	2	pc	2.79 /pc	● ● ● ● ● ● ● ●							
Screw set with wall anchors for wall bracket (long)													
													
	Set comprising: 12 screws, 12 washers, 12 wall anchors.												
		ZK0071 0001	1	pc	3.66 /pc	● ● ● ● ● ● ● ●							
Cover caps													
													
	For wall bracket ZB0264..., ZB0265..., ZB0287...												
	Set comprising 12 pcs.												
	White	ZA0092 0001	12	pc	0.11 /pc	● ● ● ● ● ● ● ●							
	Grey	ZA0092 0002	12	pc	0.16 /pc	● ● ● ● ● ● ● ●							

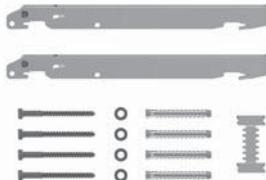Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FHO	FHO	FTV	FTP	PKO/PLK	PHO/PLK
Quick-mounting brackets set for Type 11 - 33											
	For universal use. Distance to wall: 30 mm Set comprising: 2 brackets, painted, with sound insulation, 1 shift restraint, painted, 4 screws, 4 wall anchors, 4 washers.										
Suitable for requirement classes I and II.	White										
	Height 300 mm	ZB0262 0001	1	pc	12.55 /pc	●	●	●	●	●	●
	Height 400 mm	ZB0262 0002	1	pc	12.55 /pc	●	●	●	●	●	●
	Height 500 mm	ZB0262 0003	1	pc	12.55 /pc	●	●	●	●	●	●
	Height 554 mm	ZB0262 0004	1	pc	12.55 /pc	●				●	
	Height 600 mm	ZB0262 0005	1	pc	12.55 /pc	●	●	●	●	●	●
	Height 750 mm	ZB0262 0006	1	pc	12.55 /pc	●		●	●	●	
	Height 900 mm	ZB0262 0007	1	pc	12.55 /pc	●	●	●	●	●	●
	Height 954 mm	ZB0262 0008	1	pc	12.55 /pc	●				●	
Quick mounting brackets set for Type 11 - 33											
	For universal use. Distance to wall: 50 mm Set comprising: 2 brackets, painted, with sound insulation, 1 shift restraint, painted, 4 screws, 4 wall anchors, 4 washers.										
Suitable for requirement classes I and II.	White										
	Height 300 mm	ZB0266 0001	1	pc	12.55 /pc	●	●	●	●	●	●
	Height 400 mm	ZB0266 0002	1	pc	12.55 /pc	●	●	●	●	●	●
	Height 500 mm	ZB0266 0003	1	pc	12.55 /pc	●	●	●	●	●	●
	Height 600 mm	ZB0266 0004	1	pc	12.55 /pc	●	●	●	●	●	●
	Height 750 mm	ZB0266 0005	1	pc	12.55 /pc	●		●	●	●	
	Height 900 mm	ZB0266 0006	1	pc	12.55 /pc	●	●	●	●	●	●
Quick mounting brackets set for Type 10											
	Distance to wall: 60 mm Set comprising: 2 brackets, painted, with sound insulation, 1 shift restraint, painted, 4 screws, 4 wall anchors, 4 washers.										
Suitable for requirement classes I and II. Not suitable for Type 10 with centre connection.	White										
	Height 300 mm	ZB0266 0007	1	pc	12.55 /pc	●	●	●	●	●	●
	Height 400 mm	ZB0266 0008	1	pc	12.55 /pc	●	●	●	●	●	●
	Height 500 mm	ZB0266 0009	1	pc	12.55 /pc	●	●	●	●	●	●
	Height 600 mm	ZB0266 0010	1	pc	12.55 /pc	●	●	●	●	●	●
	Height 750 mm	ZB0266 0011	1	pc	12.55 /pc	●		●	●		
	Height 900 mm	ZB0266 0012	1	pc	12.55 /pc	●	●	●	●	●	●

Steel panel radiator accessories – Wall fixing

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FTP	PRO/PK	PHO/PK
Quick mounting bracket for Type 11 -33 as 3rd bracket from length 1800 mm (set)											
	Distance to wall: 30 mm										
Set comprising:											
1 bracket, painted, with sound insulation, 2 screws, 2 wall anchors, 2 washers.											
Suitable for requirement classes I and II.	White										
	Height 300 mm	ZB0263 0001	1	pc	6.32 / pc	●	●	●	●	●	●
	Height 400 mm	ZB0263 0002	1	pc	6.32 / pc	●	●	●	●	●	●
	Height 500 mm	ZB0263 0003	1	pc	6.32 / pc	●	●	●	●	●	●
	Height 554 mm	ZB0263 0004	1	pc	6.32 / pc	●					
	Height 600 mm	ZB0263 0005	1	pc	6.32 / pc	●	●	●	●	●	●
	Height 750 mm	ZB0263 0006	1	pc	6.32 / pc	●	●	●	●		
	Height 900 mm	ZB0263 0007	1	pc	6.32 / pc	●	●	●	●	●	●
	Height 954 mm	ZB0263 0008	1	pc	6.32 / pc	●					
Quick mounting bracket for Type 11 -33 as 3rd bracket from length 1800 mm (set)											
	Distance to wall: 50 mm										
Set comprising:											
1 bracket, painted, with sound insulation, 2 screws, 2 wall anchors, 2 washers.											
Suitable for requirement classes I and II.	White										
	Height 300 mm	ZB0267 0001	1	pc	6.32 / pc	●	●	●	●	●	●
	Height 400 mm	ZB0267 0002	1	pc	6.32 / pc	●	●	●	●	●	●
	Height 500 mm	ZB0267 0003	1	pc	6.32 / pc	●	●	●	●	●	●
	Height 600 mm	ZB0267 0004	1	pc	6.32 / pc	●	●	●	●	●	●
	Height 750 mm	ZB0267 0005	1	pc	6.32 / pc	●	●	●			
	Height 900 mm	ZB0267 0006	1	pc	6.32 / pc	●	●	●	●	●	●
Quick mounting bracket for Type 10 as 3rd bracket from length 1800 mm (set)											
	Distance to wall: 60 mm										
Set comprising:											
1 bracket, painted, with sound insulation, 2 screws, 2 wall anchors, 2 washers.											
Suitable for requirement classes I and II. Not suitable for Type 10 with centre connection.	White										
	Height 300 mm	ZB0267 0007	1	pc	6.32 / pc	●	●	●	●	●	●
	Height 400 mm	ZB0267 0008	1	pc	6.32 / pc	●	●	●	●	●	●
	Height 500 mm	ZB0267 0009	1	pc	6.32 / pc	●	●	●	●	●	●
	Height 600 mm	ZB0267 0010	1	pc	6.32 / pc	●	●	●	●	●	●
	Height 750 mm	ZB0267 0011	1	pc	6.32 / pc	●	●	●			
	Height 900 mm	ZB0267 0012	1	pc	6.32 / pc	●	●	●	●	●	●

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FIP	PKO/PLK	PHO/PLK
Wall rails set											
	 <p>Wall rails set for installation of Kermi steel panel radiators Type 12, 22, and 33.</p> <p>Note: Also available as an individual bracket, see page 70.</p> <p>Set comprising: 2 wall rails, 4 screws, 4 wall anchors.</p>										
Suitable for requirement classes I, II, and III*. Number of fixing points depends on radiator size. See table page 71. * For height 300 mm to 954 mm, requirement class III is fulfilled through the additional use of shift restraint ZK00800001.											
For Profile panel radiators											
Height 200 mm, type 22	ZB0297 0017	1	pc	12.50 / pc		●	●				
Height 200 mm, type 33	ZB0297 0019	1	pc	18.49 / pc		●	●				
Height 300 mm	ZB0297 0001	1	pc	12.50 / pc		●	●	●			
Height 400 mm	ZB0297 0002	1	pc	12.97 / pc		●	●	●			
Height 500 mm	ZB0297 0003	1	pc	13.42 / pc		●	●	●			
Height 554 mm	ZB0297 0004	1	pc	13.65 / pc		●					
Height 600 mm	ZB0297 0005	1	pc	13.88 / pc		●	●	●			
Height 750 mm	ZB0297 0006	1	pc	14.57 / pc		●	●	●			
Height 900 mm	ZB0297 0007	1	pc	15.26 / pc		●	●	●			
Height 954 mm	ZB0297 0008	1	pc	15.48 / pc		●					
For Plan / Line steel panel radiators											
Height 200 mm, type 22	ZB0297 0016	1	pc	12.50 / pc		●	●				
Height 200 mm, type 33	ZB0297 0018	1	pc	18.49 / pc		●	●				
Height 300 mm	ZB0297 0009	1	pc	12.50 / pc		●	●	●			
Height 400 mm	ZB0297 0010	1	pc	12.97 / pc		●	●	●			
Height 500 mm	ZB0297 0011	1	pc	13.42 / pc		●	●	●			
Height 554 mm	ZB0297 0012	1	pc	13.65 / pc		●					
Height 600 mm	ZB0297 0013	1	pc	13.88 / pc		●	●	●			
Height 900 mm	ZB0297 0014	1	pc	15.26 / pc		●	●	●			
Height 954 mm	ZB0297 0015	1	pc	15.48 / pc		●					
Shift restraint for wall rails set											
	 <p>For wall rail ZB0297...</p> <p>One set per radiator required.</p> <p>Set comprising 2 pieces.</p>										
Suitable for requirement class III. Not necessary for height 200.		ZK0080 0001	2	pc	14.44 / pc		●	●	●	●	●

Steel panel radiator accessories – Wall fixing

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FTP	PRO/PLK	PHO/PBK
Wall rails set as 3rd bracket											
	Wall rails set for installation of Kermi steel panel radiators Type 12, 22, and 33. Set comprising: 1 wall rail, 2 screws, 2 wall anchors.										
For Profile panel radiators											
Height 200 mm, type 22	ZB0464 0001	1	pc	7.81 / pc	● ●						
Height 200 mm, type 33	ZB0464 0002	1	pc	11.56 / pc	● ●						
Height 300 mm	ZB0464 0003	1	pc	7.81 / pc	● ● ●						
Height 400 mm	ZB0464 0004	1	pc	8.11 / pc	● ● ●						
Height 500 mm	ZB0464 0005	1	pc	8.39 / pc	● ● ●						
Height 554 mm	ZB0464 0006	1	pc	8.53 / pc	●						
Height 600 mm	ZB0464 0007	1	pc	8.67 / pc	● ● ●						
Height 750 mm	ZB0464 0008	1	pc	9.11 / pc	● ● ●						
Height 900 mm	ZB0464 0009	1	pc	9.54 / pc	● ● ●						
Height 954 mm	ZB0464 0010	1	pc	9.67 / pc	●						
For Plan/Line steel panel radiators											
Height 200 mm, type 22	ZB0465 0001	1	pc	7.81 / pc		● ●					
Height 200 mm, type 33	ZB0465 0002	1	pc	11.56 / pc		● ●					
Height 300 mm	ZB0465 0003	1	pc	7.81 / pc		● ● ●					
Height 400 mm	ZB0465 0004	1	pc	8.11 / pc		● ● ●					
Height 500 mm	ZB0465 0005	1	pc	8.39 / pc		● ● ●					
Height 554 mm	ZB0465 0006	1	pc	8.53 / pc		●					
Height 600 mm	ZB0465 0007	1	pc	8.67 / pc		● ● ●					
Height 900 mm	ZB0465 0008	1	pc	9.54 / pc		● ● ●					
Height 954 mm	ZB0465 0009	1	pc	9.67 / pc		●					

Wall rails set

The minimum number of fixing points for each wall material for requirement classes I - III

		Wall material limestone block (KS12) / concrete		
Height	Length	300 - 400		500 - 954
		Requirement class		Requirement class
I - II	III	I - III		
400	2	2	2	2
500	2	2	2	2
600	2	2	2	2
700	2	2	2	2
800	2	2	2	2
900	2	2	2	2
1000	2	2	2	2
1100 - 1200	2	2	2	2
1300 - 1400	2	3	2	2
1500 - 1600	2	3	2	2
1700 - 1800	3	3	3	3
1900 - 2000	3	3	3	3
2100 - 2200	3	4	3	3
2300 - 2400	3	4	3	3
2500 - 2600	3	4	3	3
2700 - 2800	3	4	3	3
2900 - 3000	3	4	3	3

Note: not for type 10, 11, 20, 30!

Wall rails set

The minimum number of fixing points for each wall material for requirement classes I - III

		Wall material Poroton							
Height	Length	Type 22		Type 33		Type 12-33		Type 12-33	
		Requirement class		Requirement class		Requirement class		Requirement class	
I - II	III	I - II	III	I - II	III	I - II	III	I - II	III
400	2	2	2	2	2	2	2	2	2
500	2	2	2	2	2	2	2	2	2
600	2	2	2	2	2	2	2	2	2
700	2	2	2	2	2	2	2	2	2
800	2	2	2	2	2	2	2	2	2
900	2	2	2	2	2	2	2	2	2
1000	2	2	2	2	2	2	2	2	2
1100 - 1200	2	2	2	2	2	2	3	2	2
1300 - 1400	2	3	2	2	3	3	3	2	3
1500 - 1600	2	3	2	2	3	3	3	3	3
1700 - 1800	3	3	3	3	3	3	4	3	3
1900 - 2000	3	4	3	3	4	4	4	3	4
2100 - 2200	3	4	3	3	4	4	4	3	4
2300 - 2400	3	4	3	4	4	4	5	4	5
2500 - 2600	3	4	3	3	4	4	5	4	5
2700 - 2800	3	5	3	4	4	5	5	4	5
2900 - 3000	3	5	3	4	4	5	5	4	5

Note: not for type 10, 11, 20, 30!

Steel panel radiator accessories – Wall fixing



Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FTP	PRO/PLK	PHO/PBK
Unfinished wall installation set	 <p>For quick mounting brackets, for installation on unplastered walls.</p> <p>Set comprising: 2 sets of spacer washers, 2 bottom spacers, 2 screws 8 x 100 mm.</p>	ZB0157 0001	1	pc	2.85 /pc	●	●	●	●	●	●
Universal pre-assembling jig	 <p>Pre-assembling jig with integrated flushing bend. Connection G 3/4" external thread. Distance to wall continuously adjustable, enables pre-installation without installation of the radiator with integrated valve</p> <p>Also possible for Verteo with centre connection.</p>	ZK0015 0001	1	pc	19.28 /pc	●	●	●	●	●	●
Pre-assembling jig set	 <p>Pre-assembling jig with connection plug G 3/4" external thread, distance to wall 30 mm for Type 11-33 and 50 mm for Type 10, enables pre-installation without installation of the radiator with integrated valve.</p> <p>Set comprising: 1 pre-assembling jig, 2 blanking plugs.</p> <p>Notice: Only suitable when fixing the radiator with a built-into-wall bracket, quick mounting bracket with distance to wall 30/50, wall bracket short and long.</p>	ZK0057 0001	1	pc	14.13 /pc	●	●	●	●	●	●

Steel panel radiator accessories – Floor fixing

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FIP	PKO/PLK	PHO/PLK
Soil stand bracket set, complete, internal											
	<p>Set comprising: 1 bracket base with stand pipe 30 x 10 mm, 1 supporting pipe (with grub screw), 1 hook (with washer and nut), 1 bracket block, 1 support for Type 11, 12, and 33, 1 support for Type 22, 2 sealing caps.</p> <p>Notice: When installing Type 11 as a valve version, the Type 11 side filler piece ZB01450001 is required! When installing Type 10, the Type 10 accessory set ZB01520001 is required! Soil stand bracket set, complete, internal not suitable for Vplus.</p>										
Suitable for requirement classes I and II.											
Soil stand bracket for height 300, 400, 500, and 554 mm (pipe length 460 mm)											
White	ZB0138 0001	1	pc		21.84 / pc	● ● ●	● ● ●				
* Please state colour and pipe length when ordering:											
Colour	ZB0138*	1	pc		27.30 / pc	● ● ●	● ● ●				
Soil stand bracket for height 600, 750, 900, and 954 mm (pipe length 760 mm)											
White	ZB0138 0002	1	pc		22.70 / pc	● ● ●	● ● ●				
* Please state colour and pipe length when ordering:											
Colour	ZB0138*	1	pc		28.38 / pc	● ● ●	● ● ●				
Soil stand bracket set, complete, internal for steel panel radiators Vplus											
	<p>Set comprising: 1 bracket base with stand pipe 30 x 10 mm, 1 supporting pipe (with grub screw), 1 hook (with washer and nut), 2 bracket blocks, 1 support for Type 22 / Type 33 2 sealing caps.</p> <p>Note: Can be used as of length 500 mm. Only suitable for finished floor mounting.</p>										
Suitable for requirement classes I and II.											
Soil stand bracket for height 300, 400, 500 mm (pipe length 460 mm)											
White	ZB0462 0001	1	pc		21.84 / pc	●	●				
* Please state colour and pipe length when ordering:											
Colour	ZB0462*	1	pc		27.30 / pc	●	●				
Soil stand bracket for height 600, 750, 900 mm (pipe length 760 mm)											
White	ZB0462 0002	1	pc		22.70 / pc	●	●				
* Please state colour and pipe length when ordering:											
Colour	ZB0462*	1	pc		28.38 / pc	●	●				

Steel panel radiator accessories – Floor fixing

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FTP	PRO/PK	PHO/PK
Centre connection set, on inside for steel panel radiators Vplus											
	Extension set for steel panel radiators Vplus from length 1800 mm for additional centre installation/stabilization.										
Suitable for requirement classes I and II.	Set comprising: 2 bracket bases 30 x 10 mm, 2 supporting pipes (with grub screw), 1 hook (with washer and nut), 4 bracket blocks, 1 connecting bracket, incl. screws, 2 supports for Type 22 / Type 33 2 sealing caps										
	Note: Can be used as of length 500 mm. Only suitable for finished floor mounting.										
Centre bracket for height 300, 400, 500 mm (pipe length 460 mm)											
White	ZB0463 0001	1	pc	46.13 / pc		●	●				
* Please state colour and height of radiator when ordering:											
Colour	ZB0463*	1	pc	57.66 / pc		●	●				
Centre bracket for height 600, 750, 900 mm (pipe length 760 mm)											
White	ZB0463 0002	1	pc	47.25 / pc		●	●				
* Please state colour and height of radiator when ordering:											
Colour	ZB0463*	1	pc	59.06 / pc		●	●				

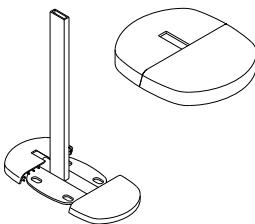Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version							
						FKO	FHO	FTV	FIP	PKO/PLK	PHO/PLK	PTV/PLV	PTP/PLP
Plastic rosette													
	For stand pipe 30 x 10 mm (when installing on an unfinished floor).												
	White	ZB0119 0001	1	pc	4.43 /pc	●	●	●	●				
	* Please state colour when ordering:												
	Colour	ZB0119*	1	pc	5.54 /pc	●	●	●	●	●	●	●	
Accessory set													
	For soil stand bracket ZB0138...												
	Set comprising: 1 separator, 1 support, 1 supporting pipe.												
	For Type 10	ZB0152 0001	1	pc	11.70 /pc	●	●	●	●	●	●	●	
Side filler piece													
	When installing Type 11 radiator with integrated valve on soil stand bracket (ZB0138...).												
	White	ZB0145 0001	1	pc	3.99 /pc	●	●	●	●	●	●	●	
	* Please state colour when ordering:												
	Colour	ZB0145*	1	pc	4.99 /pc	●	●	●	●	●	●	●	
Cover													
	For stand pipe 30 x 10 mm (for installation on finished floor).												
	White	ZB0029 0001	1	pc	8.99 /pc	●	●	●	●	●	●	●	
	* Please state colour when ordering:												
	Colour	ZB0029*	1	pc	11.24 /pc	●	●	●	●	●	●	●	

Steel panel radiator accessories – Floor fixing

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price / quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FTP	PKO/PLK	PHO/PLK
Soil stand bracket set, separable, internal											
	<p>Set comprising: 1 bracket base 30 x 10 mm, 1 upper part height 300 - 554 mm or 600 - 954 mm with connecting pipe, 1 supporting pipe (with grub screw), 1 hook (with washer and nut), 1 bracket block, 1 support for Type 11, 12, 33, 1 support for Type 22, 2 sealing caps.</p> <p>Notice: When installing Type 11 as a valve version, the Type 11 side filler piece ZB01450001 is required! When installing Type 10, the Type 10 accessory set ZB01520001 is required! Soil stand bracket set, separable, internal not suitable for Vplus.</p>										
Suitable for requirement classes I and II.											
Soil stand bracket for height 300, 400, 500, and 554 mm for installation on unfinished floor (bracket base height: 245 mm, distance between unfinished floor and radiator = 300 mm)											
White	ZB0148 0001	1	pc	25.26 / pc	● ● ●	● ● ●					
* Please state colour and height of radiator when ordering:											
Colour	ZB0148*	1	pc	31.58 / pc	● ● ●	● ● ●					
Soil stand bracket for height 600, 750, 900, and 954 mm for installation on unfinished floor (bracket base height: 245 mm, distance between unfinished floor and radiator = 300 mm)											
White	ZB0148 0002	1	pc	26.55 / pc	● ● ●	● ● ●					
* Please state colour and height of radiator when ordering:											
Colour	ZB0148*	1	pc	33.19 / pc	● ● ●	● ● ●					
Soil stand bracket for height 300, 400, 500, and 554 mm for finished floor mounting (bracket base height: 115 mm, finished floor/radiator = 170 mm)											
White	ZB0146 0001	1	pc	25.26 / pc	● ● ●	● ● ●					
* Please state colour and height of radiator when ordering:											
Colour	ZB0146*	1	pc	31.58 / pc	● ● ●	● ● ●					
Soil stand bracket for height 600, 750, 900, and 954 mm for finished floor mounting (bracket base height: 115 mm, finished floor/radiator = 170 mm)											
White	ZB0146 0002	1	pc	26.55 / pc	● ● ●	● ● ●					
* Please state colour and height of radiator when ordering:											
Colour	ZB0146*	1	pc	33.19 / pc	● ● ●	● ● ●					

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version				
						FK0	FH0	FTV	FP	PK0/PLK
Soil stand bracket set, complete, internal										
	 <p>For Type 22 (20)*.</p> <p>Set comprising:</p> <ul style="list-style-type: none"> 1 bracket base with stand pipe 60 x 10 mm, 1 supporting pipe (with grub screw), 1 hook (with washer and nut), 2 bracket blocks, 2 sealing caps. 									
Soil stand bracket for heights 300, 400, 500, and 554 mm (pipe length 450 mm)										
Suitable for requirement classes I, II, and III. Requirement class III only possible up to height 600 mm.	White	ZB0306 0001	1	pc	22.84 /pc	●	●	●	●	●
* for Hygiene versions only suitable for requirement class I and II.	* Please state colour and height of radiator when ordering:									
	Colour	ZB0306*	1	pc	28.55 /pc	●	●	●	●	●
Soil stand bracket for heights 600, 750 900, and 954 mm (pipe length 750 mm)										
Suitable for requirement classes I, II, and III. Requirement class III only possible up to height 600 mm.	White	ZB0306 0002	1	pc	23.97 /pc	●	●	●	●	●
* for Hygiene versions only suitable for requirement class I and II.	* Please state colour and height of radiator when ordering:									
	Colour	ZB0306*	1	pc	29.96 /pc	●	●	●	●	●
Soil stand bracket set, complete, internal										
	 <p>For Type 33 (30)* only with FK0, PK0, PH0, FTV, and PTV.</p> <p>Set comprising:</p> <ul style="list-style-type: none"> 1 bracket base with stand pipe 60 x 10 mm, 1 supporting pipe (with grub screw), 1 hook (with washer and nut), 2 bracket blocks, 2 sealing caps. 									
Suitable for requirement classes I, II, and III. Requirement class III only possible up to height 600 mm.	Soil stand bracket for heights 300, 400, 500, and 554 mm (pipe length 450 mm)									
* for Hygiene versions only suitable for requirement class I and II.	White	ZB0307 0001	1	pc	22.84 /pc	●	●	●	●	●
	* Please state colour and height of radiator when ordering:									
	Colour	ZB0307*	1	pc	28.55 /pc	●	●	●	●	●
Soil stand bracket for heights 600, 750 900, and 954 mm (pipe length 750 mm)										
Suitable for requirement classes I, II, and III. Requirement class III only possible up to height 600 mm.	White	ZB0307 0002	1	pc	23.97 /pc	●	●	●	●	●
* for Hygiene versions only suitable for requirement class I and II.	* Please state colour and height of radiator when ordering:									
	Colour	ZB0307*	1	pc	29.96 /pc	●	●	●	●	●

Steel panel radiator accessories – Floor fixing

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FTP	PRO/PK	PHO/PK
Soil stand bracket set, complete, internal, for finished floor mounting											
	 <p>For Type 22, height 200 (pipe length 310 mm) for finished floor mounting.</p> <p>Set comprising:</p> <ul style="list-style-type: none"> 1 bracket base with stand pipe 60 x 10 mm, 1 supporting pipe (with grub screw), 1 hook (with washer and nut), 2 bracket blocks, 2 sealing caps, 1 lug plate. 										
Suitable for requirement classes I, II, and III. Up to length 1600 mm = 2 pcs required. From length 1800 mm = 3 pcs required.	White	ZB0338 0001	1	pc	22.84 / pc	●	●	●	●		
	* Please state colour and height of radiator when ordering:										
	Colour	ZB0338*	1	pc	28.55 / pc	●	●	●	●		
Soil stand bracket set, complete, internal, for installation on unfinished floor											
	 <p>For Type 22, height 200 (pipe length 460 mm) for installation on unfinished floor.</p> <p>Set comprising:</p> <ul style="list-style-type: none"> 1 bracket base with stand pipe 60 x 10 mm, 1 supporting pipe (with grub screw), 1 hook (with washer and nut), 2 bracket blocks, 2 sealing caps, 1 lug plate. 										
Suitable for requirement classes I, II, and III. Up to length 1600 mm = 2 pcs required. From length 1800 mm = 3 pcs required.	White	ZB0408 0001	1	pc	22.84 / pc	●	●	●	●		
	* Please state colour and height of radiator when ordering:										
	Colour	ZB0408*	1	pc	28.55 / pc	●	●	●	●		
Soil stand bracket set, complete, internal, for finished floor mounting											
	 <p>For Type 33, height 200 (pipe length 310 mm). for finished floor mounting.</p> <p>Set comprising:</p> <ul style="list-style-type: none"> 1 bracket base with stand pipe 60 x 10 mm, 1 supporting pipe (with grub screw), 1 hook (with washer and nut), 2 bracket blocks, 2 sealing caps, 1 lug plate. 										
Suitable for requirement classes I, II, and III. Up to length 1600 mm = 2 pcs required. From length 1800 mm = 3 pcs required.	White	ZB0339 0001	1	pc	23.97 / pc	●	●	●	●		
	* Please state colour and height of radiator when ordering:										
	Colour	ZB0339*	1	pc	29.96 / pc	●	●	●	●		

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FIP	PKO/PLK	PHO/PLK
Soil stand bracket set, complete, internal, for installation on unfinished floor											
	For Type 33, height 200 (pipe length 460 mm). for installation on unfinished floor.										
Set comprising: 1 bracket base with stand pipe 60 x 10 mm, 1 supporting pipe (with grub screw), 1 hook (with washer and nut), 2 bracket blocks, 2 sealing caps, 1 lug plate.											
Suitable for requirement classes I, II, and III. Up to length 1600 mm = 2 pcs required. From length 1800 mm = 3 pcs required.	White	ZB0409 0001	1	pc	23.97 / pc	●	●	●	●		
	* Please state colour and height of radiator when ordering:										
	Colour	ZB0409*	1	pc	29.96 / pc	●	●	●	●		
stand bracket foot, external											
	Set comprising: 1 bracket base with stand pipe 60 x 10 mm, 1 sealing cap. One carrier set needed additionally for each type.										
Recommendation: Finished floor: Pipe length = height + 150 mm* Unfinished floor: Pipe length = height + 300 mm* * If using window sill supports ZC0105 and ZC0106 additionally + 70 mm											
Suitable for requirement classes I, II, and III up to a radiator height of 600 mm. Suitable for requirement classes I and II up to a radiator height of 954 mm.	White										
Pipe length 450 mm	ZB0308 0001	1	pc	14.50 / pc	●	●	●	●	●	●	●
Pipe length 550 mm	ZB0308 0002	1	pc	14.50 / pc	●	●	●	●	●	●	●
Pipe length 600 mm	ZB0308 0003	1	pc	14.50 / pc	●	●	●	●	●	●	●
Pipe length 650 mm	ZB0308 0004	1	pc	14.50 / pc	●	●	●	●	●	●	●
Pipe length 750 mm	ZB0308 0005	1	pc	14.50 / pc	●	●	●	●	●	●	●
* Please state colour and height of radiator when ordering:											
Colour	ZB0308*	1	pc	18.13 / pc	●	●	●	●	●	●	●
White											
Pipe length 850 mm	ZB0308 0006	1	pc	17.83 / pc	●	●	●	●	●	●	●
Pipe length 900 mm	ZB0308 0007	1	pc	17.83 / pc	●	●	●	●	●	●	●
Pipe length 1050 mm	ZB0308 0008	1	pc	17.83 / pc	●	●	●	●	●	●	●
Pipe length 1200 mm	ZB0308 0009	1	pc	17.83 / pc	●	●	●	●	●	●	●
* Please state colour and height of radiator when ordering:											
Colour	ZB0308*	1	pc	22.29 / pc	●	●	●	●	●	●	●

Steel panel radiator accessories – Floor fixing

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version							
						FKO	FHO	FTV	FTP	PRO/PK	PHO/PK	PTV/PLV	PTP/PLP
Support set for stand bracket foot													
	For stand bracket foot 60 x 10 mm. For Type 12-33.												
	Set comprising: 1 support for upper lug (incl. grub screw), 1 support for lower radiator edge (incl. grub screw), 1 shift restraint ZK00200001, 2 sound insulation clips.												
Suitable for requirement classes I, II, and III.	White	ZB0309 0001	1	pc	14.50/pc	●	●	●	●	●	●	●	●
	* Please state colour when ordering:	ZB0309*	1	pc	18.13/pc	●	●	●	●	●	●	●	●
Support set for stand bracket foot													
	For stand bracket foot 60 x 10 mm. For Type 10 except for Vplus. For Typ 11.												
	Set comprising: 1 support for upper lug (incl. grub screw), 1 support for lower lug (incl. grub screw), 1 shift restraint ZK00200001, 2 sound insulation clips.												
Suitable for requirement classes I, II, and III.	White	ZB0310 0001	1	pc	14.50/pc	●	●	●	●	●	●	●	●
	* Please state colour when ordering:	ZB0310*	1	pc	18.13/pc	●	●	●	●	●	●	●	●
Support set for stand bracket foot													
	For stand bracket foot 60 x 10 mm. For Type 10 Vplus.												
	Set comprising: 1 support for upper lug (incl. grub screw), 1 support for lower lug (incl. grub screw), 1 shift restraint ZK00200001, 2 sound insulation clips.												
Suitable for requirement classes I, II, and III.	White	ZB0461 0001	1	pc	14.50/pc	●	●	●	●	●	●	●	●
	* Please state colour when ordering:	ZB0461*	1	pc	18.13/pc	●	●	●	●	●	●	●	●

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version							
						FKO	FHO	FTV	FIP	PKO/PLK	PHO/PLK	PTV/PLV	PTP/PLP
Window sill support													
													
	For stand pipe 60 x 10 mm. Depth: 160 mm Can only be used with stand bracket foot, external.												
	Notice: Pay attention – pipe length + 70 mm!												
White	ZC0105 0001	1	pc		17.50 / pc	●	●	●	●	●	●	●	●
* Please state colour when ordering:													
Colour	ZC0105*	1	pc		21.88 / pc	●	●	●	●	●	●	●	●
Window sill support													
													
	For stand pipe 60 x 10 mm. Depth: 200 mm Can only be used with stand bracket foot, external.												
	Notice: Pay attention – pipe length + 70 mm!												
White	ZC0106 0001	1	pc		17.50 / pc	●	●	●	●	●	●	●	●
* Please state colour when ordering:													
Colour	ZC0106*	1	pc		21.88 / pc	●	●	●	●	●	●	●	●

Steel panel radiator accessories – Floor fixing

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version							
						FKO	FHO	FTV	FTP	PRO/PK	PHO/PK	PTV/PLV	PIP/PLP
Cover rosette	 <p>Metal, for stand pipe 60 x 10 mm (when installing on an unfinished floor).</p> <p>Not for soil stand bracket ZB0338... + ZB0339...</p>	ZB0311 0001	1	pc	11.15 / pc	● ● ● ● ● ● ● ●							
	* Please state colour when ordering:	ZB0311*	1	pc	13.94 / pc	● ● ● ● ● ● ● ●							
Cover	 <p>Metal, for bracket base (pipe 60 x 10 mm) (for installation on finished floor).</p> <p>Not for soil stand bracket ZB0408... + ZB0409...</p>	ZB0312 0001	1	pc	16.72 / pc	● ● ● ● ● ● ● ●							
	* Please state colour when ordering:	ZB0312*	1	pc	20.90 / pc	● ● ● ● ● ● ● ●							
Cover rosette	 <p>Plastic, for stand pipe 60 x 10 mm (when installing on an unfinished floor).</p>	ZB0373 0001	1	pc	4.47 / pc	● ● ● ● ● ● ● ●							
	* Please state colour when ordering:	ZB0373*	1	pc	5.59 / pc	● ● ● ● ● ● ● ●							
Cover	 <p>Plastic, for stand pipe 60 x 10 mm (for installation on finished floor).</p>	ZB0374 0001	1	pc	9.47 / pc	● ● ● ● ● ● ● ●							
	* Please state colour when ordering:	ZB0374*	1	pc	11.84 / pc	● ● ● ● ● ● ● ●							

Steel panel radiator accessories

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version							
						FKO	FHO	FTV	FIP	PKO/PLK	PHO/PLK	PTV/PLV	PTP/PLP
Window sill support	<p>Window sill support for steel panel radiators.</p> <p>Type 22 and 33.</p> <p>Adjustment range 160 - 270 mm Adjustable height 80 - 120 mm</p> 	ZC0038 0001	1	pc	23.41 /pc	●	●	●	●	●	●	●	●
Double rosette	<p>Plastic, 50 mm spacing, to cover the connection pipes from the floor.</p> 	White	ZT0066 0001	1	pc	2.29 /pc	●	●	●	●	●	●	●
Towel rail for steel panel radiators	<p>For universal use.</p> <p>Depth: 61 mm Pipe diameter: 19 mm</p> <p>Surface white</p> 	Length 450 mm Length 600 mm	ZC0040 0001 ZC0040 0002	1 1	pc pc	16.87 /pc 17.70 /pc	●	●	●	●	●	●	●
Cleaning brush	Cleaning brush for steel panel radiators.	ZK0013 0001	1	pc	48.97 /pc	●	●	●	●	●	●	●	●

Steel panel radiator accessories – Screw connections

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FTP	PRO/PK	PHO/PK
One-pipe valve, straight	<p>50 mm hub distance. With ball shut-off valve for radiator with integrated valve with 3/4" external thread (euro taper). Pipe end with 3/4" euro taper for connection of copper, mild steel, stainless steel, plastic and multilayer pipe in conjunction with suitable clamp screw connections. With non-return valve.</p> 			1	pc	23.40 / pc	●	●		●	●
One-pipe valve, angled	<p>50 mm hub distance. With ball shut-off valve for radiator with integrated valve with 3/4" external thread (euro taper). Pipe end with 3/4" euro taper for connection of copper, mild steel, stainless steel, plastic and multilayer pipe in conjunction with suitable clamp screw connections. With non-return valve.</p> 			1	pc	23.40 / pc	●	●		●	●
Two-pipe valve, straight	<p>50 mm hub distance. With ball shut-off valve for radiator with integrated valve with 3/4" external thread (euro taper). Pipe end with 3/4" euro taper for connection of copper, mild steel, stainless steel, plastic and multilayer pipe in conjunction with suitable clamp screw connections.</p> 			1	pc	13.65 / pc	●	●		●	●
Two-pipe valve, angled	<p>50 mm hub distance. With ball shut-off valve for radiator with integrated valve with 3/4" external thread (euro taper). Pipe end with 3/4" euro taper for connection of copper, mild steel, stainless steel, plastic and multilayer pipe in conjunction with suitable clamp screw connections.</p> 			1	pc	13.65 / pc	●	●		●	●
Cover for fitting, straight	<p>Cover for two-pipe valve, straight. Lockable (ZV01050001)</p> 	ZV0107 0001	1	pc	13.65 / pc						
	White	ZA0106 0001	1	pc	6.65 / pc	●	●			●	●
	chrome	ZA0106 0002	1	pc	8.25 / pc	●	●			●	●

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FIP	PKO/PLK	PHO/PLK
Cover for angled fitting	Cover for 2-pipe valve, angled. Lockable (ZV01070001)										
		White	ZA0107 0001	1	pc	6.65 /pc	●	●		●	●
		chrome	ZA0107 0002	1	pc	8.25 /pc	●	●		●	●
Adapters											
		For adapting existing axial distances to the valves.									
		Set comprising 2 pieces.									
		Set 1 for axial distance of min. 40/50 to max. 60/50	ZT0107 0001	2	pc	13.02 /pc	●	●		●	●
		Set 2 for axial distance of min. 34/50 to max. 66/50	ZT0107 0002	2	pc	13.02 /pc	●	●		●	●
Clamp screw connection											
		Set comprising: 2 clamp screw connections for connecting the radiator to copper pipes (bare, nickel-plated, chrome-plated), mild steel, carbon steel and stainless steel pipes, suitable for 3/4" euro taper, with elastic seal, no support sleeve required.									
		Set comprising 2 pieces.									
		12 mm	ZT0139 0002	2	pc	4.14 /pc	●	●		●	●
		14 mm	ZT0139 0003	2	pc	4.14 /pc	●	●		●	●
		15 mm	ZT0139 0004	2	pc	4.14 /pc	●	●		●	●
		16 mm	ZT0139 0005	2	pc	4.14 /pc	●	●		●	●
		18 mm	ZT0139 0006	2	pc	4.14 /pc	●	●		●	●
Clamp screw connection											
		Set comprising: 2 clamp screw connections for plastic and metal composite pipes, suitable for 3/4" euro taper, comprising nut size 27, plastic locking ring and grommet, O-ring seal on the grommet.									
		Set comprising 2 pieces.									
		14 mm	ZT0163 0001	2	pc	5.36 /pc	●	●		●	●
		16 mm	ZT0163 0002	2	pc	5.36 /pc	●	●		●	●

k_V inserts for radiator with integrated valve

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FTP	PRO/PLK	PHO/PBK
k_V adjustment key					ZV0036 0001	1	pc	2.42 / pc		● ●	● ●
k_V insert standard	<p>k_V insert Kermi V6K-S (standard valve) with continuously opening adjustable flange, 8 k_V main settings and 7 intermediate settings.</p> <p>Fits all Kermi steel panel radiators with integrated valve produced after 01/2001.</p> <p>Certified according to EN 215 (Register No. 6T0006)</p>				ZV0170 0001	1	pc	9.27 / pc		● ●	● ●
k_V insert for low quantities of water (remote heating installations)	<p>k_V insert Kermi V3K-F (fine pressure adjustment valve) with continuously opening adjustable flange, 8 main k_V settings and 7 intermediate settings.</p> <p>Fits all Kermi steel panel radiators with integrated valve produced after 01/2001.</p> <p>Certified according to EN 215 (Register No. 6T0002 + 6T0006)</p>				ZV0005 0001	1	pc	9.27 / pc		● ●	● ●
k_V insert V1K Service, standard	<p>Standard k_V insert as replacement for valves V1K K6 + K9 (1991 - 1993) for Kermi steel panel radiators with integrated valve.</p>				ZV0087 0001	1	pc	23.99 / pc		● ●	● ●

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version							
						FKO	FHO	FTV	FIP	PKO/PLK	PHO/PLK	PTV/PLV	PTP/PLP
k_v insert V1K Service for low quantities of water (remote heating installations)	 k _v insert for low quantities of water as replacement for valves V1K K3 (1991 - 1993) for Kermi steel panel radiators with integrated valve.	ZV0087 0002	1	pc	23.99 /pc	● ●	● ●						
k_v insert V1K/V2K Service, standard	 Standard k _v insert as replacement for valves V1K K6 + K9 (1994 - 1999) and V2K K6 + K9 (03 / 1999 - 12/2000) for Kermi steel panel radiators with integrated valve.	ZV0063 0001	1	pc	23.99 /pc	● ●	● ●	● ●	● ●				
k_v insert V1K/V2K Service for low quantities of water (remote heating installations)	 k _v insert for low quantities of water as replacement for valves V1K K3 (1994 - 1999) and V2K K3 (03 / 1999 - 12/2000) for Kermi steel panel radiators with integrated valve.	ZV0062 0001	1	pc	23.99 /pc	● ●	● ●	● ●	● ●				
Blanking plug	 1/2" blanking plug, incl. O-ring seal. Sealing cap instead of valve insert. e.g. for control of adjacent areas.	ZT0052 0001	10	pc	2.04 /pc	●	●	●	●	●	●	●	●
Separating plug set for one-pipe system	 For connecting compact steel panel radiators in a one-pipe system. Only suited for multilayer steel panel radiators. Set comprising: 1 separating plug, 1 assembly key	ZT0082 0001	1	pc	6.11 /pc	●	●	●	●				
Separating plug for coupled therm-x2 compact radiators	 For the same-side connection of at least 2 coupled therm-x2 compact radiators.	ZT0081 0001	1	pc	4.47 /pc	●	●	●	●				

Spare parts / covers for Plan / Line / Profile radiators

Top cover for Profile radiators

from 10/93	Length	Type 11, 12		Type 22		Type 33	
		Product code	EUR/piece	Product code	EUR/piece	Product code	EUR/piece
	400	ZA0016 0001	14.85	ZA0017 0001	14.85	ZA0018 0001	14.85
	500	ZA0016 0002	14.85	ZA0017 0002	14.85	ZA0018 0002	14.85
	600	ZA0016 0003	14.85	ZA0017 0003	14.85	ZA0018 0003	14.85
	700	ZA0016 0004	14.85	ZA0017 0004	14.85	ZA0018 0004	14.85
	800	ZA0016 0005	14.85	ZA0017 0005	14.85	ZA0018 0005	14.85
	900	ZA0016 0006	14.85	ZA0017 0006	14.85	ZA0018 0006	14.85
	1000	ZA0016 0007	14.85	ZA0017 0007	14.85	ZA0018 0007	14.85
	1100	ZA0016 0008	29.70	ZA0017 0008	29.70	ZA0018 0008	29.70
	1200	ZA0016 0009	29.70	ZA0017 0009	29.70	ZA0018 0009	29.70
	1300	ZA0016 0010	29.70	ZA0017 0010	29.70	ZA0018 0010	29.70
	1400	ZA0016 0011	29.70	ZA0017 0011	29.70	ZA0018 0011	29.70
	1600	ZA0016 0012	29.70	ZA0017 0012	29.70	ZA0018 0012	29.70
	1800	ZA0016 0013	29.70	ZA0017 0013	29.70	ZA0018 0013	29.70
	2000	ZA0016 0014	29.70	ZA0017 0014	29.70	ZA0018 0014	29.70
	2300	ZA0016 0015	44.54	ZA0017 0015	44.54	ZA0018 0015	44.54
	2600	ZA0016 0016	44.54	ZA0017 0016	44.54	ZA0018 0016	44.54
	3000	ZA0016 0017	44.54	ZA0017 0017	44.54	ZA0018 0017	44.54

Top cover for Plan / Line radiators

	Length	Type 11, 12		Type 22		Type 33	
		Product code	EUR/piece	Product code	EUR/piece	Product code	EUR/piece
	405	ZA0021 0001	22.26	ZA0022 0001	22.26	ZA0023 0001	22.26
	505	ZA0021 0002	22.26	ZA0022 0002	22.26	ZA0023 0002	22.26
	605	ZA0021 0003	22.26	ZA0022 0003	22.26	ZA0023 0003	22.26
	705	ZA0021 0004	22.26	ZA0022 0004	22.26	ZA0023 0004	22.26
	805	ZA0021 0005	22.26	ZA0022 0005	22.26	ZA0023 0005	22.26
	905	ZA0021 0006	22.26	ZA0022 0006	22.26	ZA0023 0006	22.26
	1005	ZA0021 0007	22.26	ZA0022 0007	22.26	ZA0023 0007	22.26
	1105	ZA0021 0008	29.70	ZA0022 0008	29.70	ZA0023 0008	29.70
	1205	ZA0021 0009	29.70	ZA0022 0009	29.70	ZA0023 0009	29.70
	1305	ZA0021 0017	29.70	ZA0022 0017	29.70	ZA0023 0017	29.70
	1405	ZA0021 0010	29.70	ZA0022 0010	29.70	ZA0023 0010	29.70
	1605	ZA0021 0011	29.70	ZA0022 0011	29.70	ZA0023 0011	29.70
	1805	ZA0021 0012	29.70	ZA0022 0012	29.70	ZA0023 0012	29.70
	2005	ZA0021 0013	29.70	ZA0022 0013	29.70	ZA0023 0013	29.70
	2305	ZA0021 0014	44.54	ZA0022 0014	44.54	ZA0023 0014	44.54
	2605	ZA0021 0015	44.54	ZA0022 0015	44.54	ZA0023 0015	44.54
	3005	ZA0021 0016	44.54	ZA0022 0016	44.54	ZA0023 0016	44.54

Replacement parts / side panels for radiator with integrated valve

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FIP	PKO/PLK	PHO/PLK
Side panel for radiators with integrated valve Type 11, 12											
	Connecting side Height 300/305 mm	ZA0175 0001	1	pc	14.85 /pc	●	●	●	●	●	●
	Connecting side Height 400/405 mm	ZA0175 0002	1	pc	14.85 /pc	●	●	●	●	●	●
	Connecting side Height 500/505 mm	ZA0175 0003	1	pc	14.85 /pc	●	●	●	●	●	●
	Connecting side Height 600/605 mm	ZA0175 0004	1	pc	14.85 /pc	●	●	●	●	●	●
	Connecting side Height 750 mm	ZA0175 0005	1	pc	14.85 /pc	●	●	●	●	●	●
	Connecting side Height 900/905 mm	ZA0175 0006	1	pc	14.85 /pc	●	●	●	●	●	●
	Height 300/305 mm	ZA0175 0007	1	pc	14.85 /pc	●	●	●	●	●	●
	Height 400/405 mm	ZA0175 0008	1	pc	14.85 /pc	●	●	●	●	●	●
	Height 500/505 mm	ZA0175 0009	1	pc	14.85 /pc	●	●	●	●	●	●
	Height 600/605 mm	ZA0175 0011	1	pc	14.85 /pc	●	●	●	●	●	●
	Height 750 mm	ZA0175 0012	1	pc	14.85 /pc	●	●	●	●	●	●
	Height 900/905 mm	ZA0175 0013	1	pc	14.85 /pc	●	●	●	●	●	●
Side panel for radiators with integrated valve Type 22											
	Connecting side Height 200/205 mm	ZA0176 0001	1	pc	20.68 /pc	●	●	●	●	●	●
	Connecting side Height 300/305 mm	ZA0176 0002	1	pc	20.68 /pc	●	●	●	●	●	●
	Connecting side Height 400/405 mm	ZA0176 0003	1	pc	20.68 /pc	●	●	●	●	●	●
	Connecting side Height 500/505 mm	ZA0176 0004	1	pc	20.68 /pc	●	●	●	●	●	●
	Connecting side Height 600/605 mm	ZA0176 0005	1	pc	20.68 /pc	●	●	●	●	●	●
	Connecting side Height 750 mm	ZA0176 0006	1	pc	20.68 /pc	●	●	●	●	●	●
	Connecting side Height 900/905 mm	ZA0176 0007	1	pc	20.68 /pc	●	●	●	●	●	●
	Height 200/205 mm	ZA0176 0008	1	pc	20.68 /pc	●	●	●	●	●	●
	Height 300/305 mm	ZA0176 0009	1	pc	20.68 /pc	●	●	●	●	●	●
	Height 400/405 mm	ZA0176 0010	1	pc	20.68 /pc	●	●	●	●	●	●
	Height 500/505 mm	ZA0176 0011	1	pc	20.68 /pc	●	●	●	●	●	●
	Height 600/605 mm	ZA0176 0013	1	pc	20.68 /pc	●	●	●	●	●	●
	Height 750 mm	ZA0176 0014	1	pc	20.68 /pc	●	●	●	●	●	●
	Height 900/905 mm	ZA0176 0015	1	pc	20.68 /pc	●	●	●	●	●	●
Side panel for radiators with integrated valve, connection on right Type 33											
	on right Height 200/205 mm	ZA0177 0022	1	pc	26.68 /pc	●	●	●	●	●	●
	on right Height 300/305 mm	ZA0177 0023	1	pc	26.68 /pc	●	●	●	●	●	●
	on right Height 400/405 mm	ZA0177 0024	1	pc	26.68 /pc	●	●	●	●	●	●
	on right Height 500/505 mm	ZA0177 0025	1	pc	26.68 /pc	●	●	●	●	●	●
	on right Height 600/605 mm	ZA0177 0026	1	pc	26.68 /pc	●	●	●	●	●	●
	on right Height 750 mm	ZA0177 0027	1	pc	26.68 /pc	●	●	●	●	●	●
	on right Height 900/905 mm	ZA0177 0028	1	pc	26.68 /pc	●	●	●	●	●	●
	on left Height 200/205 mm	ZA0177 0015	1	pc	26.68 /pc	●	●	●	●	●	●
	on left Height 300/305 mm	ZA0177 0016	1	pc	26.68 /pc	●	●	●	●	●	●
	on left Height 400/405 mm	ZA0177 0017	1	pc	26.68 /pc	●	●	●	●	●	●
	on left Height 500/505 mm	ZA0177 0018	1	pc	26.68 /pc	●	●	●	●	●	●
	on left Height 600/605 mm	ZA0177 0019	1	pc	26.68 /pc	●	●	●	●	●	●
	on left Height 750 mm	ZA0177 0020	1	pc	26.68 /pc	●	●	●	●	●	●
	on left Height 900/905 mm	ZA0177 0021	1	pc	26.68 /pc	●	●	●	●	●	●

Replacement parts / side panels for radiator with integrated valve

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version						
						FKO	FHO	FTV	FTP	PRO/PLK	PHO/PBK	PTV/PLV
Side panel for radiators with integrated valve, connection on left Type 33												
	on right Height 200/205 mm	ZA0177 0008	1	pc	26.68/pc		●				●	
	on right Height 300/305 mm	ZA0177 0009	1	pc	26.68/pc		●				●	
	on right Height 400/405 mm	ZA0177 0010	1	pc	26.68/pc		●				●	
	on right Height 500/505 mm	ZA0177 0011	1	pc	26.68/pc		●				●	
	on right Height 600/605 mm	ZA0177 0012	1	pc	26.68/pc		●				●	
	on right Height 750 mm	ZA0177 0013	1	pc	26.68/pc		●				●	
	on right Height 900/905 mm	ZA0177 0014	1	pc	26.68/pc		●				●	
	on left Height 200/205 mm	ZA0177 0001	1	pc	26.68/pc		●				●	
	on left Height 300/305 mm	ZA0177 0002	1	pc	26.68/pc		●				●	
	on left Height 400/405 mm	ZA0177 0003	1	pc	26.68/pc		●				●	
	on left Height 500/505 mm	ZA0177 0004	1	pc	26.68/pc		●				●	
	on left Height 600/605 mm	ZA0177 0005	1	pc	26.68/pc		●				●	
	on left Height 750 mm	ZA0177 0006	1	pc	26.68/pc		●				●	
	on left Height 900/905 mm	ZA0177 0007	1	pc	26.68/pc		●				●	
Side panel for radiators with integrated valve, centre connection Type 33												
	on right Height 300/305 mm	ZA0177 0016	1	pc	26.68/pc		●				●	
	on right Height 400/405 mm	ZA0177 0017	1	pc	26.68/pc		●				●	
	on right Height 500/505 mm	ZA0177 0018	1	pc	26.68/pc		●				●	
	on right Height 600/605 mm	ZA0177 0019	1	pc	26.68/pc		●				●	
	on right Height 750 mm	ZA0177 0020	1	pc	26.68/pc		●				●	
	on right Height 900/905 mm	ZA0177 0021	1	pc	26.68/pc		●				●	
	on left Height 300/305 mm	ZA0177 0009	1	pc	26.68/pc		●				●	
	on left Height 400/405 mm	ZA0177 0010	1	pc	26.68/pc		●				●	
	on left Height 500/505 mm	ZA0177 0011	1	pc	26.68/pc		●				●	
	on left Height 600/605 mm	ZA0177 0012	1	pc	26.68/pc		●				●	
	on left Height 750 mm	ZA0177 0013	1	pc	26.68/pc		●				●	
	on left Height 900/905 mm	ZA0177 0014	1	pc	26.68/pc		●				●	

Replacement parts / side panels for compact radiators

Discount group – Accessories

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FIP	PKO/PLK	PHO/PLK
Side panel for compact radiators Type 11, 12											
	Height 300/305 mm	ZA0175 0007	1	pc	14.85 /pc	●				●	
	Height 400/405 mm	ZA0175 0008	1	pc	14.85 /pc	●				●	
	Height 500/505 mm	ZA0175 0009	1	pc	14.85 /pc	●				●	
	Height 554/559 mm	ZA0175 0010	1	pc	14.85 /pc	●				●	
	Height 600/605 mm	ZA0175 0011	1	pc	14.85 /pc	●				●	
	Height 750 mm	ZA0175 0012	1	pc	14.85 /pc	●				●	
	Height 900/905 mm	ZA0175 0013	1	pc	14.85 /pc	●				●	
	Height 954/959 mm	ZA0175 0014	1	pc	14.85 /pc	●				●	
Side panel for compact radiators Type 22											
	Height 200/205 mm	ZA0176 0008	1	pc	20.68 /pc	●				●	
	Height 300/305 mm	ZA0176 0009	1	pc	20.68 /pc	●				●	
	Height 400/405 mm	ZA0176 0010	1	pc	20.68 /pc	●				●	
	Height 500/505 mm	ZA0176 0011	1	pc	20.68 /pc	●				●	
	Height 554/559 mm	ZA0176 0012	1	pc	20.68 /pc	●				●	
	Height 600/605 mm	ZA0176 0013	1	pc	20.68 /pc	●				●	
	Height 750 mm	ZA0176 0014	1	pc	20.68 /pc	●				●	
	Height 900/905 mm	ZA0176 0015	1	pc	20.68 /pc	●				●	
	Height 954/959 mm	ZA0176 0016	1	pc	20.68 /pc	●				●	
Side panel for compact radiators Type 33											
	on right	Height 200/205 mm	ZA0177 0008	1	pc	26.68 /pc	●			●	
	on right	Height 300/305 mm	ZA0177 0009	1	pc	26.68 /pc	●			●	
	on right	Height 400/405 mm	ZA0177 0010	1	pc	26.68 /pc	●			●	
	on right	Height 500/505 mm	ZA0177 0011	1	pc	26.68 /pc	●			●	
	on right	Height 554/559 mm	ZA0177 0031	1	pc	26.68 /pc	●			●	
	on right	Height 600/605 mm	ZA0177 0012	1	pc	26.68 /pc	●			●	
	on right	Height 750 mm	ZA0177 0013	1	pc	26.68 /pc	●			●	
	on right	Height 900/905 mm	ZA0177 0014	1	pc	26.68 /pc	●			●	
	on right	Height 954/959 mm	ZA0177 0032	1	pc	26.68 /pc	●			●	
	on left	Height 200/205 mm	ZA0177 0015	1	pc	26.68 /pc	●			●	
	on left	Height 300/305 mm	ZA0177 0016	1	pc	26.68 /pc	●			●	
	on left	Height 400/405 mm	ZA0177 0017	1	pc	26.68 /pc	●			●	
	on left	Height 500/505 mm	ZA0177 0018	1	pc	26.68 /pc	●			●	
	on left	Height 554/559 mm	ZA0177 0029	1	pc	26.68 /pc	●			●	
	on left	Height 600/605 mm	ZA0177 0019	1	pc	26.68 /pc	●			●	
	on left	Height 750 mm	ZA0177 0020	1	pc	26.68 /pc	●			●	
	on left	Height 900/905 mm	ZA0177 0021	1	pc	26.68 /pc	●			●	
	on left	Height 954/959 mm	ZA0177 0030	1	pc	26.68 /pc	●			●	

Replacement parts / fixing accessories for covers / panels

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FTP	PROFLK	PHOPLK
Kermi Clip											
	For Type 11-33. Up to 03/2018.										
	Set comprising 10 pcs.										
		on left									
	White	ZK0006 0001	10	pc	0.43/pc	●	●	●	●	●	●
	Silver metallic	ZK0006 0002	10	pc	0.43/pc	●	●	●	●	●	●
		on right									
	White	ZK0007 0001	10	pc	0.43/pc	●	●	●	●	●	●
	Silver metallic	ZK0007 0002	10	pc	0.43/pc	●	●	●	●	●	●
Kermi Clip											
	For Type 11-33. From 04/2018.										
	Set comprising 10 pcs.										
		on left									
	White	ZK0120 0001	10	pc	0.43/pc	●	●	●	●	●	●
	Silver metallic	ZK0120 0002	10	pc	0.43/pc	●	●	●	●	●	●
		on right									
	White	ZK0121 0001	10	pc	0.43/pc	●	●	●	●	●	●
	Silver metallic	ZK0121 0002	10	pc	0.43/pc	●	●	●	●	●	●
Fixing adaptor											
		Fixing adaptor for height 600 mm for retrofitting top cover and side panels from 10/1993 on Profile radiators until 10/1993.									
	Set comprising 10 pcs.										
	White	ZK0014 0001	10	pc	0.88/pc	●	●				
Retaining bar for top cover, Type 11											
		From 10/2000.									
	Set comprising 10 pcs.										
	White	ZA0020 0001	10	pc	1.18/pc	●	●	●	●	●	●
	Silver metallic	ZA0020 0004	10	pc	1.18/pc	●	●	●	●	●	●
Retaining bar for top cover, Type 12											
		From 10/1993 to 09/2000.									
	Set comprising 10 pcs.										
	White	ZA0019 0003	10	pc	1.92/pc	●	●	●	●	●	●
		From 10/2000.									
	Set comprising 10 pcs.										
	White	ZA0020 0002	10	pc	1.18/pc	●	●	●	●	●	●
	Silver metallic	ZA0020 0005	10	pc	1.18/pc	●	●	●	●	●	●

Replacement parts / radiator finish

Description Figure	Description	Product code	Delivery quantity	Quantity unit	Price/quantity unit EUR excl. VAT	Radiator version					
						FKO	FHO	FTV	FIP	PKO/PLK	PHO/PLK
Retaining bar for top cover, Type 22/33											
	From 05/1996 to 09/2000. From 07/2015 for height 200.										
	Set comprising 10 pcs.										
	White	ZA0019 0001	10	pc	1.33/pc	●	●	●	●		
	Silver metallic	ZA0019 0004	10	pc	1.33/pc	●	●	●	●		
	From 10/2000.										
	Set comprising 10 pcs.										
	White	ZA0020 0003	10	pc	1.18/pc	●	●	●	●	●	
	Silver metallic	ZA0020 0006	10	pc	1.18/pc	●	●	●	●	●	
Spray can											
	150 ml										
	Kermi white	ZK0016 0001	1	pc	10.28/pc	●	●	●	●	●	
Touch-up pen											
	Touch-up pens in other colours on request.										
	Kermi white	ZK0010 0001	1	pc	6.86/pc	●	●	●	●	●	

Ordering example for compact radiators

Please state product code when ordering.

Ordering example

therm-x2 Profile-K,

Type 33,

Height 400 mm,

Length 800 mm,

Colour white (RAL 9016)

therm-x2 Plan-K replacement,

Type 22,

Height 559 mm,

Length 1305 mm,

Colour white (RAL 9016)

FK0330408W02

PK022D513W02

Model	Type	Height	Length		Installation set	
therm-x2 Profile-K/Profile-K replacement	FK0	10	Profile 300 mm / Plan/Line 305 mm	03	Profile 400 mm / Plan/Line 405 mm	04
therm-x2 Profile-K Hygiene		11	Profile 400 mm / Plan/Line 405 mm	04	Profile 500 mm / Plan/Line 505 mm	05
therm-x2 Plan-K/Plan-K replacement		PK0	Profile 500 mm / Plan/Line 505 mm	05	Profile 600 mm / Plan/Line 605 mm	06
therm-x2 Plan-K Hygiene		PH0	Profile 600 mm / Plan/Line 605 mm	06	Profile 700 mm / Plan/Line 705 mm	07
		22	Profile 750 mm	07	Profile 800 mm / Plan/Line 805 mm	08
		30	Profile 900 mm / Plan/Line 905 mm	09	Profile 900 mm / Plan/Line 905 mm	09
		33	Replacement		Profile 1000 mm / Plan/Line 1005 mm	10
			Profile 554 mm / Plan 559 mm	D5	Profile 1100 mm / Plan/Line 1105 mm	11
			Profile 954 mm / Plan 959 mm	D9	Profile 1200 mm / Plan/Line 1205 mm	12
					Profile 1300 mm / Plan/Line 1305 mm	13
					Profile 1400 mm / Plan/Line 1405 mm	14
					Profile 1600 mm / Plan/Line 1605 mm	16
					Profile 1800 mm / Plan/Line 1805 mm	18
					Profile 2000 mm / Plan/Line 2005 mm	20
					Profile 2300 mm / Plan/Line 2305 mm	23
					Profile 2600 mm / Plan/Line 2605 mm	26
					Profile 3000 mm / Plan/Line 3005 mm	30

Ordering example for radiator with integrated valve and Line compact radiator

Please state product code when ordering.

Ordering example

therm-x2 Profile-Vplus,

Type 11,

Height 900 mm,

Length 1600 mm,

Colour white (RAL 9016),

Connection on left

FTP110901601L2K

therm-x2 Plan-V,

Type 22,

Height 305 mm,

Length 905 mm,

Colour white (RAL 9016),

Connection on right

PTV220300901R2K

Model	Type	Height	Length	Colour	Connection	Installation set						
therm-x2 Profile-V/ Profile-V Hygiene	FTV	10	Profile 200 mm*/ Plan/Line 205 mm*	020	Profile 400 mm / Plan/Line 405 mm	040	Kermi white (RAL 9016)	1	Valve/Connection on right	R	Wall brackets (long)	2K
therm-x2 Profile-Vplus/ Profile-Vplus Hygiene	FTP	11	Profile 300 mm / Plan/Line 305 mm	030	Profile 500 mm / Plan/Line 505 mm	050			Valve/connection on left	L	Height 200 mm without brackets	XK
therm-x2 Plan-V/ Plan-V Hygiene	PTV	12	Profile 400 mm / Plan/Line 405 mm	040	Profile 600 mm / Plan/Line 605 mm	060			Compact	N		
therm-x2 Plan-Vplus/ Plan-Vplus Hygiene	PTP	20	Profile 500 mm / Plan/Line 505 mm	050	Profile 700 mm / Plan/Line 705 mm	070						
therm-x2 Line-V/ Line-V Hygiene	PLV	22	Profile 600 mm / Plan/Line 605 mm	060	Profile 800 mm / Plan/Line 805 mm	080						
therm-x2 Line-Vplus/ Line-Vplus Hygiene	PLP	30	Profile 750 mm	070	Profile 900 mm / Plan/Line 905 mm	090						
therm-x2 Line-K/Line-K replacement/Line-K Hygiene	PLK	33	Profile 900 mm / Plan/Line 905 mm	090	Profile 1000 mm / Plan/Line 1005 mm	100						
therm-x2 Profile-K**	FK0		Replacement		Profile 1100 mm / Plan/Line 1105 mm	110						
therm-x2 Plan-K**	PK0		Line 559 mm	055	Profile 1200 mm / Plan/Line 1205 mm	120						
			Line 959 mm	095	Profile 1300 mm / Plan/Line 1305 mm	130						
					Profile 1400 mm / Plan/Line 1405 mm	140						
					Profile 1600 mm / Plan/Line 1605 mm	160						
					Profile 1800 mm / Plan/Line 1805 mm	180						
					Profile 2000 mm / Plan/Line 2005 mm	200						
					Profile 2300 mm / Plan/Line 2305 mm	230						
					Profile 2600 mm / Plan/Line 2605 mm	260						
					Profile 3000 mm / Plan/Line 3005 mm	300						

** only height 200/205 mm

*Height 200/205 mm only for Type 22/33, without fixing accessories in scope of delivery, without lugs, without x2 technology.

Technical data – Profile radiators

Brief product description	RAL Gen. Dwg. Reg. No.	Heights (BH) mm	Lengths (BL) mm	Depths (BT) mm
therm-x2 Profile-K				
Type 10 single row without convector without cover	0112	300-900	400-3000	61
Type 11 single row one convector with cover	0113	300-900	400-3000	61
Type 12 x2 double row with convector with cover with serial flow	0114	300-900	400-3000	64
Type 22 x2 double row with two convectors with cover with serial flow	0116	200-900	400-3000	100
Type 33 x2 triple row three convectors with cover with serial flow	0117	200-900	400-3000	155
therm-x2 Profile-K replacement for hub distance 500/900 mm				
Type 12 x2 double row with convector with cover with serial flow	0114	554, 954	400-3000	64
Type 22 x2 double row with two convectors with cover with serial flow	0116	554, 954	400-3000	100
Type 33 x2 triple row three convectors with cover with serial flow	0117	554, 954	400-3000	155
therm-x2 Profile compact radiators				
Hub distance Height – 54 mm				
Connections 4 x G 1/2" internal thread				
Operating conditions max. operating temperature 110 °C, max. operating pressure 10 bar (test pressure 13 bar)				
Scope of delivery Type 10: Installation set with air vent plugs included, as well as screwed-in blanking plugs. Type 11-33: With top cover and side panels, installation set with air vent plugs included, as well as screwed-in blanking plugs. Type 12-33: Additionally with therm-x2 separating plug. Height 200: without lugs and fixing accessories, without x2 technology.				
Fixing 4 lugs on the rear panel of the radiator (from length 1800, 6 pieces); installation set included as standard (except for height 200)				
Paint finish Kermi white (RAL 9016) Customised colouring also possible with the Kermi colour concept.				
therm-x2 Profile Hygiene radiator				
Please see specifications of Profile compact and Profile radiators with integrated valve.				
Exception: Scope of delivery: Hygiene radiators do not have top cover and side panels.				

Technical data – Profile radiators

Brief product description	RAL Gen. Dwg. Reg. No.	Heights (BH) mm	Lengths (BL) mm	Depths (BT) mm
therm-x2 Profile-V				
Type 10 single row without convector without cover	0112	300-900	400-3000	61
Type 11 single row one convector with cover	0113	300-900	400-3000	61
Type 12 double row with convector with cover with serial flow x2	0114	300-900	400-3000	64
Type 22 double row with two convectors with cover with serial flow x2	0116	200-900	400-3000	100
Type 33 triple row three convectors with cover with serial flow x2	0117	200-900	400-3000	155
therm-x2 Profile-Vplus				
Type 10 single row without convector without cover	0112	300-900	400-2600	61
Type 11 single row one convector with cover	0113	300-900	400-2600	61
Type 12 double row with convector with cover with serial flow x2	0114	300-900	400-2600	64
Type 22 double row with two convectors with cover with serial flow x2	0116	300-900	400-2600	100
Type 33 triple row three convectors with cover with serial flow x2	0117	300-900	400-2600	155
therm-x2 Profile-K Hygiene / Profile-V Hygiene				
Type 10 single row without convector without cover	0112	300-900	400-3000	61
Type 20 double row without convector without cover with serial flow x2	0606	300-900	400-3000	100
Type 30 triple row without convector without cover with serial flow x2	0607	300-900	400-3000	155
therm-x2 Profile radiator with integrated valve				
Connections				
2 x G 3/4" external thread for clamp screw connection at bottom on right (on special order at bottom on left – without surcharge), for single pipe: use bypass fitting				
3 x G 1/2" internal thread on side				
For version Vplus				
2 x G 3/4" external thread at the bottom in the centre, flow always on left				
2 x G 3/4" external thread at the bottom on the side, flow always inside				
4 x G 1/2" internal thread on side				
Standard = valve on right (valve on left available without surcharge)				
All connections tightly sealed at the factory.				
Operating conditions				
max. operating temperature 110 °C,				
max. operating temperature 90 °C for Vplus,				
max. operating pressure 10 bar (test pressure 13 bar)				
Scope of delivery				
Type 10: with preset valve and screwed-in blanking and air vent plugs.				
Type 11-33: With preset valve, top cover, side panels, as well as screwed-in blanking and air vent plugs. Installation set included with all types. Height 200: without lugs and fixing accessories, without x2 technology				
Fixing				
4 lugs on the rear panel of the radiator (from length 1800, 6 pieces); installation set included as standard (except for height 200)				
Paint finish				
Kermi white (RAL 9016)				
Customised colouring also possible with the Kermi colour concept.				
therm-x2 Profile Hygiene radiator				
Please see specifications of Profile compact and Profile radiators with integrated valve.				
Exception:				
Scope of delivery: Hygiene radiators do not have top cover and side panels.				

Technical data Plan / Line radiators

Brief product description		RAL Gen. Dwg. Reg. No.	Heights (BH) mm	Lengths (BL) mm	Depths (BT) mm	
therm-x2 Plan / Line-K						
Type 10	single row without convector without cover		0124	305 - 905	405 - 3005	63
Type 11	single row one convector with cover		0125	305 - 905	405 - 3005	63
Type 12 x2	double row with convector with cover with serial flow		0126	305 - 905	405 - 3005	66
Type 22 x2	double row with two convectors with cover with serial flow		0128	205 - 905	405 - 3005	102
Type 33 x2	triple row three convectors with cover with serial flow		0129	205 - 905	405 - 3005	157
therm-x2 Plan / Line-K replacement for hub distance 500/900 mm						
Type 12 x2	double row with convector with cover with serial flow		0126	559, 959	405 - 3005	66
Type 22 x2	double row with two convectors with cover with serial flow		0128	559, 959	405 - 3005	102
Type 33 x2	triple row three convectors with cover with serial flow		0129	559, 959	405 - 3005	157
therm-x2 Plan / Line compact radiator						
Hub distance						
Height – 59 mm						
Connections						
4 x G 1/2" internal thread						
Operating conditions						
max. operating temperature 110 °C, max. operating pressure 10 bar (test pressure 13 bar)						
Scope of delivery						
Type 10: Installation set with air vent plugs included, as well as screwed-in blanking plugs.						
Type 11 – 33: With top cover and side panels, installation set with air vent plugs included, as well as screwed-in blanking plugs.						
Type 12 – 33: Additionally with therm-x2 separating plug. Height 205: without lugs and fixing accessories, without x2 technology.						
Fixing						
4 lugs on the rear panel of the radiator (from length 1805, 6 pieces); installation set included as standard (except for height 205).						
Paint finish						
Kermi white (RAL 9016) Customised colouring also possible with the Kermi colour concept.						

Technical data Plan / Line radiators

Brief product description	RAL Gen. Dwg. Reg. No.	Heights (BH) mm	Lengths (BL) mm	Depths (BT) mm
therm-x2 Plan / Line-V				
Type 10 single row without convector without cover	0124	305-905	405-3005	63
Type 11 single row one convector with cover	0125	305-905	405-3005	63
Type 12 double row with convector with cover with serial flow x2	0126	305-905	405-3005	66
Type 22 double row with two convectors with cover with serial flow x2	0128	205-905	405-3005	102
Type 33 triple row three convectors with cover with serial flow x2	0129	205-905	405-3005	157
therm-x2 Plan / Line-Vplus				
Type 10 single row without convector without cover	0124	305-905	405-2605	63
Type 11 single row one convector with cover	0125	305-905	405-2605	63
Type 12 double row with convector with cover with serial flow x2	0126	305-905	405-2605	66
Type 20 double row without convector without cover with serial flow x2	0130	305-905	405-2605	102
Type 22 double row with two convectors with cover with serial flow x2	0128	305-905	405-2605	102
Type 30 triple row without convector without cover with serial flow x2	0131	305-905	405-2605	157
Type 33 triple row three convectors with cover with serial flow x2	0129	305-905	405-2605	157
therm-x2 Plan / Line-K Hygiene / Plan / Line-V Hygiene				
Type 10 single row without convector without cover	0124	305-905	405-3005	63
Type 20 double row without convector without cover with serial flow x2	0130	305-905	405-3005	102
Type 30 triple row without convector without cover with serial flow x2	0131	305-905	405-3005	157
therm-x2 Plan / Line radiator with integrated valve				
Connections				
2 x G 3/4" external thread for clamp screw connection at bottom on right (on special order at bottom on left – without surcharge), for single pipe: use bypass fitting 3 x G 1/2" internal thread on side				
For version Vplus				
2 x G 3/4" external thread at the bottom in the centre, flow always on left				
2 x G 3/4" external thread at the bottom on the side, flow always inside				
4 x G 1/2" internal thread on side				
Standard = valve on right (valve on left available without surcharge)				
all connections tightly sealed at the factory.				
Operating conditions				
max. operating temperature 110 °C,				
max. operating temperature 90 °C for Vplus, operating pressure 10 bar (test pressure 13 bar)				
Scope of delivery				
Type 10: with preset valve and screwed-in blanking and air vent plugs.				
Type 11-33: With preset valve, top cover, side panels, as well as screwed-in blanking and air vent plugs. Installation set included with all types. Height 205: without lugs and fixing accessories, without x2 technology				
Fixing				
4 lugs on the rear panel of the radiator (from length 1805, 6 pieces); installation set included as standard (except for height 205)				
Paint finish				
Kermi white (RAL 9016)				
Customised colouring also possible with the Kermi colour concept.				
therm-x2 Plan / Line Hygiene radiators				
Please see specifications of Plan compact and Plan radiator with integrated valve.				
Exception:				
Scope of delivery: Hygiene radiators do not have top cover and side panels.				

Technical data Verteo®Profile / Plan / Line radiator

Brief product description	Gen. Dwg. Reg. No.	RAL	Heights (BH) mm	Lengths (BL) mm	Depths (BT) mm
Verteo Profile FSN					
Type 10 single row	0903	1600 - 2200	400 - 700	61	
Type 20 double row without convector with cover with serial flow concept x2	0904	1600 - 2400	300 - 800	64	
Type 21 double row with convector with cover with serial flow x2	0905	1600 - 2400	300 - 800	64	
Type 22 double row with two convectors with cover with serial flow concept x2	0906	1600 - 2400	300 - 800	100	
Verteo Plan / Verteo Line (PSN / PLS)					
Type 10 single row	1210	1600 - 2200	400 - 700	63	
Type 20 double row without convector with cover with serial flow concept x2	0907	1600 - 2400	300 - 800	66	
Type 21 double row with convector with cover with serial flow concept x2	0908	1600 - 2400	300 - 800	66	
Type 22 double row with two convectors with cover with serial flow concept x2	0909	1600 - 2400	300 - 800	102	
Verteo Profile / Verteo Plan / Verteo Line					
Connections	4 x 1/2" internal thread at bottom 2 x 1/2" internal thread at top Connection from top and bottom possible. Flow always on left, return always on right. 50 mm centre connection at bottom makes installation of a valve shut-off block possible.				
Operating conditions	max. operating temperature 110 °C, max. operating pressure 10 bar (test pressure 13 bar)				
Scope of delivery	Incl. lugs, primed and powder-coated. Side panels. Installation accessories (wall brackets (short), screws, wall anchors, dehazing safety devices, sound insulation clips, blanking and air vent plugs, spacers) included without surcharge.				
Fixing	Lug mounting with 4 lugs. Quick and easy installation with wall brackets included as standard in the scope of delivery. Orientation in horizontal and vertical direction possible.				
Paint finish	Kermi white (RAL 9016) Customised colouring also possible with the Kermi colour concept.				



x-change
heat pump



x-buffer
heat storage



x-center
control



x-net panel
heating/cooling



therm-x2
steel panel radiators



x-well
residential ventilation



Design radiators



Heating panel



Convector



Kermi Decor



Wet floor system



Shower enclosure

Healthy, comfortable heat and unlimited showering comfort with the comprehensive Kermi thermal comfort and shower design ranges.

You can find additional information on
www.kermi.com



Thermal comfort | Shower design

Kermi GmbH
Pankofen-Bahnhof 1
D-94447 Plattling
GERMANY

Tel. +49 (0) 9931 501-0
Fax +49 (0) 9931 3075
www.kermi.com
info@kermi.com

A company of Arbonia Group
ARBONIA